

VT GTL 50 gripper system

Compact, powerful and water pressure tight gripping tool for harsh environments and heavy load applications

Features

- Watertight up to 50 m
- ▶ 360° rotation
- High gripping force
- Various tool attachments for maximum flexibility
- Carbon pole endlessly extendable
- Optional attachable lighting and camera for live monitoring


Applications

- Ideal for recovering heavy foreign bodies and positioning of parts
- Different, exchangeable gripper tool attachments makes it
- flexible for individual applications

Technical specifications - VT GTL 50 gripper system

This document is for general information only, please consult the system manual for detailed specifications


Housing	stainless steel and anodized aluminum
Dimenion (ø x L)	50x485 mm
Weight	3.1 kg
Watertight	5 bar / 50 m
Roation angle	infinite
Apeture angle	120°
Gripping force	~ 200 N
Power supply	
Operating temperature water	
Operating temperature air	
Radiation tolerant	
Total dose	
Optionals	camera, different jaws, carbon pole
Features	integrated slipping clutch for rotation

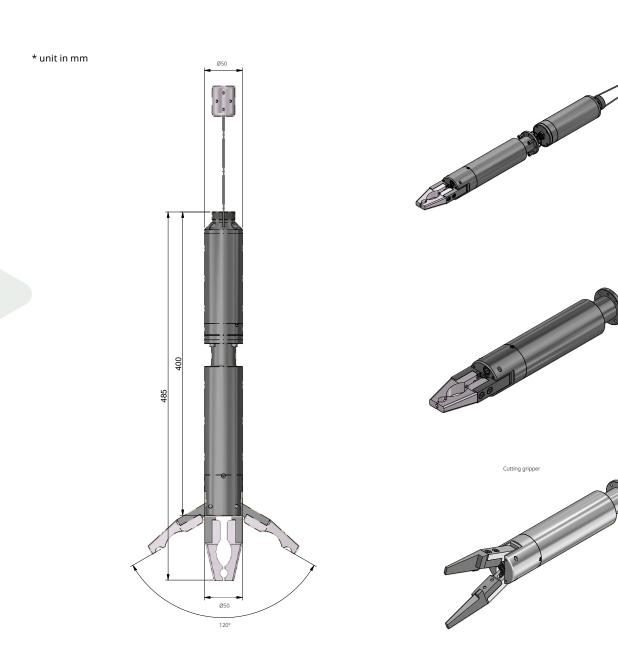

Setup

Possible combinations



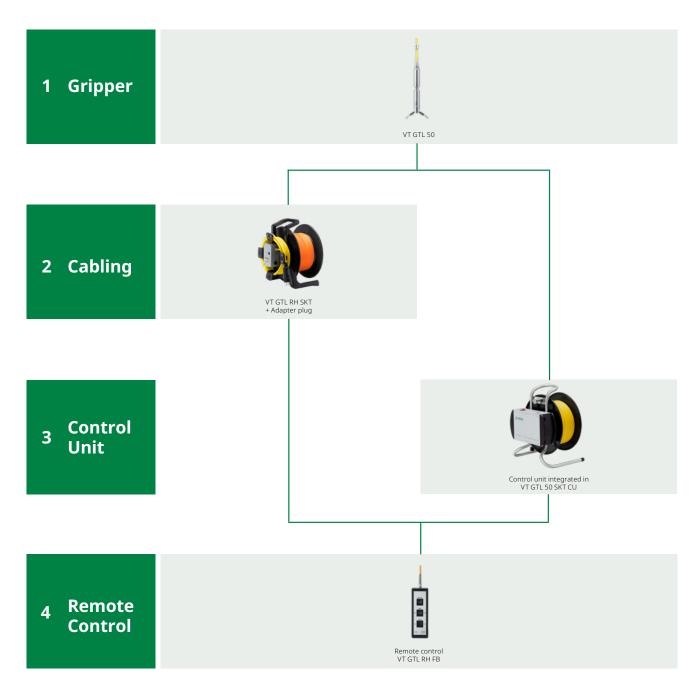

Accessories



Holder for camera VT 25 FL

Optional attachable lighting and camera for live monitoring



VT GH Vario tool holder

Variable railing bracket with stainless steel adapter for connecting the camera to 29 or 42 mm diameter carbon poles




VT 29 carbon poles - 29 or 42 mm diameter

Connectable carbon poles for deployment of cameras and tools - standard lengths are 1 and 2 m



Manhole holder

Versatile positioner for 29 or 42 mm carbon poles

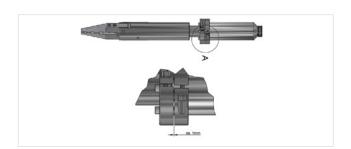

Rotation stop

Mechanical rotation stop to limit the rotation of the gripper

DEKRA Visatec GmbH

Gewerbepark 7 87477 Sulzberg/See Germany Tel. + 49.8376.9215 0 info.dvg@dekra.com

dekra-visatec.com