

# VT 34 PT V02 / VT 36 PT V02

## camera system brochure



### VT 34 PT V02 / VT 36 PT V02 inspection camera

**Extremely compact & watertight SD camera with dimmable lighting, pan and tilt function, available with an outer diameter of 34 mm or 36 mm**

#### Features

- ▶ Small and robust design in stainless steel/acrylic glass
- ▶ Pan & tilt
- ▶ Radiation resistant
- ▶ PAL/NTSC
- ▶ Integrated LED lighting
- ▶ VT 34 PT V02 version watertight up to 5 bar/50 meters
- ▶ VT 36 PT V02 version watertight up to 50 bar/500 meters

#### Applications

- ▶ All visual inspections and monitoring applications
- ▶ Nuclear, oil & gas, chemical and petrochemical inspections
- ▶ Industrial applications
- ▶ Decommissioning applications




# Technical specifications - VT 34 PT V02 / VT 36 PT V02 camera

This document is for general information only,  
please consult the system manual for detailed specifications

Housing	stainless steel
Image sensor / number of effective pixels	1/3" CCD
Horizontal resolution	600 TVL
Signal system	PAL/NTSC
Minimum illumination	0.08 lx
Optical zoom	n/a
Digital zoom	n/a
Focus	manual (motorized)
FOV	~50°
Minimum object distance	---
Video output	CVBS
Range - PAN	infinite
Range - TILT	210° ( $\pm 105^\circ$ )
Lighting	9x LED
Luminous flux	~ 90 lm
Dimension (ø x L)	34x92.9 mm (VT 34 PT V02) / 36x93.8 mm (VT 36 PT V02)
Weight	155 / 190 g
Operating temperature	---
Water tight / water depth	5 bar / 50 m (VT 34 PT V02) / 50 bar / 500 m (VT 36 PT V02)
Radiation tolerant	3,300 rad/h (33 Gy/h)*
Total dose	42,900 rad (429 Gy)
Optionals	---
Features	---


\* many ray pixels

\* unit in mm

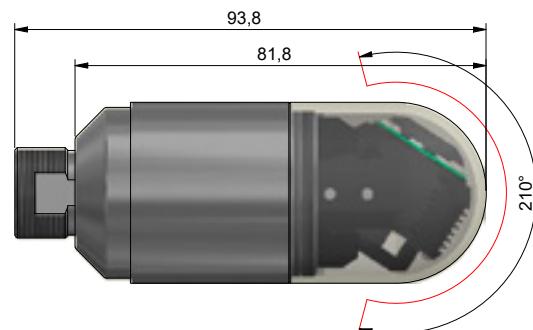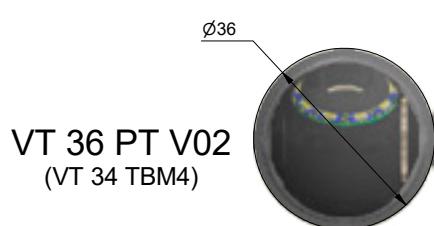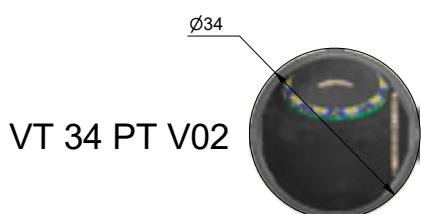

# Setup

## Possible combinations

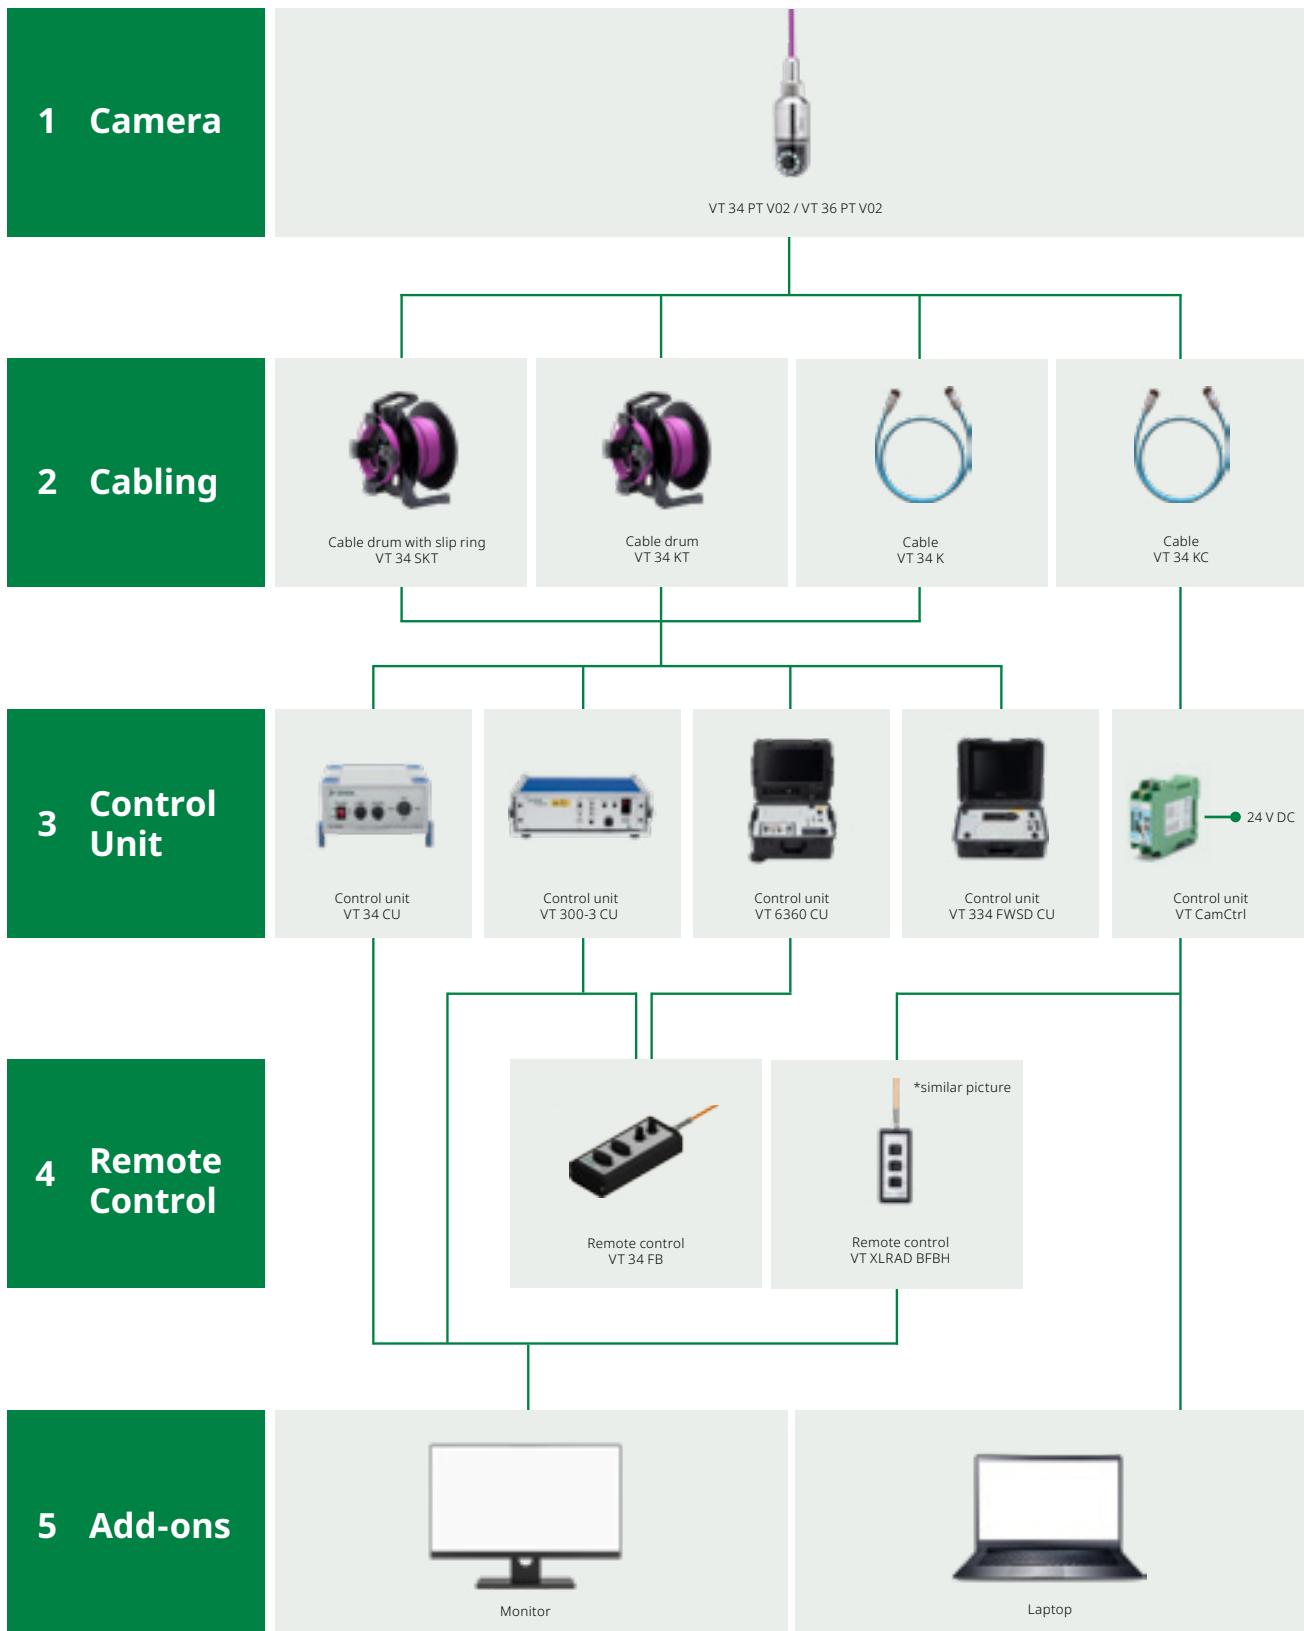

## Accessories



### VT 29 carbon poles - 29 or 42 mm diameter

Connectable carbon poles for deployment of cameras and tools - standard lengths are 1 and 2 m




### VT 34 PT holder

Bracket with quick-release coupling for connecting the camera to the carbon pole




### VT GH Vario tool holder

Variable railing bracket with stainless steel adapter for connecting the camera to 29 or 42 mm diameter carbon poles

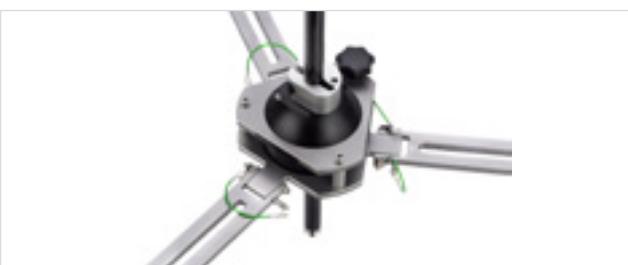

### Manhole holder

Versatile positioner for 29 or 42 mm carbon poles

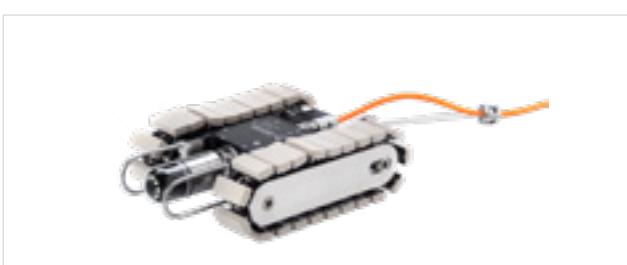

### VT 34 MFW crawler

Extremely compact, watertight and manouverable rover with integrated PT camera and various drive options in different sizes



### VT 34 dome protection

Dome protection to protect the camera from external forces

**DEKRA Visatec GmbH**  
Gewerbepark 7  
87477 Sulzberg/See Germany  
Tel. + 49.8376.9215 0  
[info.dvg@dekra.com](mailto:info.dvg@dekra.com)

[dekra-visatec.com](http://dekra-visatec.com)