

VT CamCtrl control unit brochure



VT CamCtrl control unit for DEKRA VT cameras

DIN rail 35 mm compatible and modular control unit to control camera functions

Features

- ▶ Operation of the camera functions
- ▶ Small and compact dimensions
- ▶ Modular design
- ▶ DIN rail 35 mm compatible

Applications


- ▶ Intended for the control of Dekra visatecs cameras

Technical specifications – VT CamCtrl control unit

**This document is for general information only,
please consult the system manual for detailed specifications**


Housing	robust polyethylene
Dimension	50x110x110 mm
Weight	0.28 kg
Video output	coax or twisted pair (balanced)
Connections	screw terminals
Power consumption	48 W
Input voltage	24-33 V DC / with least 2.5 A
Operating temperature	n/a
Recording	n/a
Monitor	---
Resolution	---
Brightness	---
Contrast	---
Reaction time	---
Optional	---
Features	---

* unit in mm

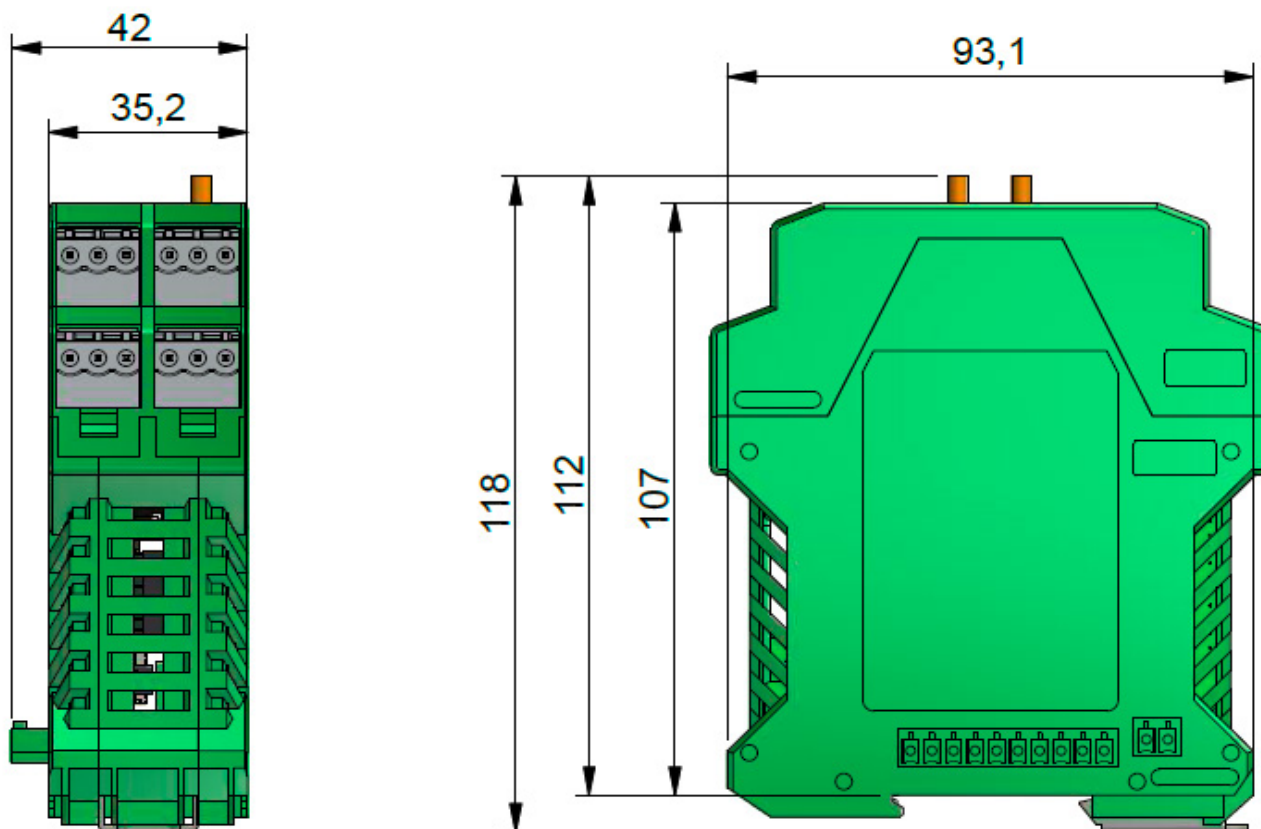

Setup

Possible combinations

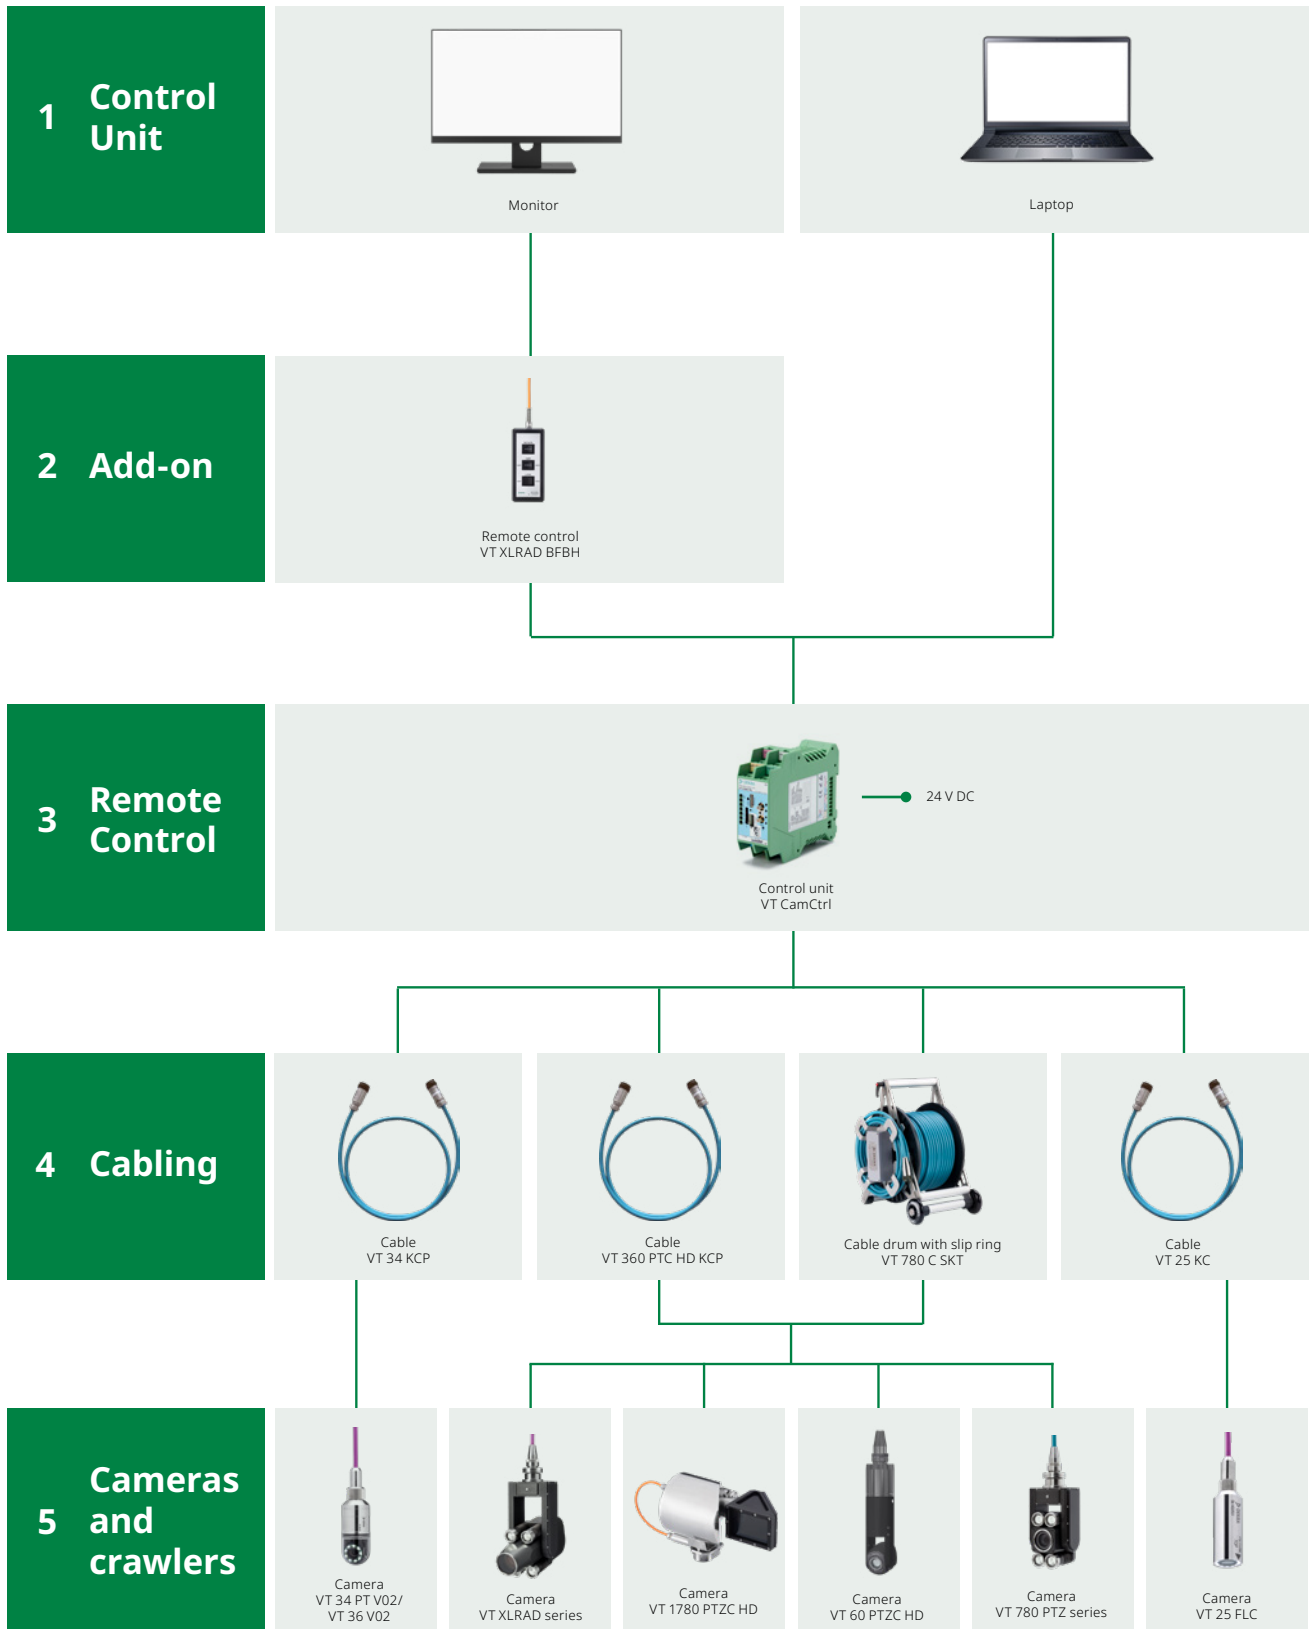

Overview



VT CamCtrl front view



VT CamCtrl back view



VT CamCtrl side view



VT CamCtrl side view

DEKRA Visatec GmbH
Gewerbepark 7
87477 Sulzberg/See Germany
Tel. + 49.8376.9215 0
info.dvg@dekra.com

dekra-visatec.com