

VT 3405 LED lighting system brochure



VT 3405 LED underwater lighting

Powerful LED lighting for additional illumination of the surrounding environments with high illumination in all directions

Features

- ▶ High output in all directions
- ▶ Watertight up to 50 m
- ▶ Compact dimensions with only 34 mm diameter
- ▶ LED light continuously dimmable
- ▶ Various frames and holders available, according to customer needs

Applications




- ▶ Small and compact
- ▶ Multi-purpose
- ▶ High light output in a small format and in the smallest of spaces

Technical specifications - VT 3405 LED underwater lighting system

This document is for general information only, please consult the system manual for detailed specifications

Material	anodized aluminum
Dimension (ø x L)	34x109 mm
Weight	0.17 kg
Watertight	5 bar / 50 m
Lighting	6x LED
Luminous flux	~ 510 lm each LED
Automatic overheat protection	automatic switch-off
Color temperaure	4,000 K
Lighting beam	---
Operating temperature water	---
Operating temperature air	---
Radiation tolerant	---
Total dose	---
Optionals	---

* unit in mm

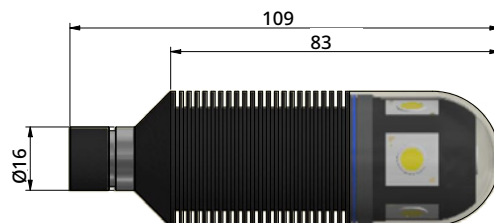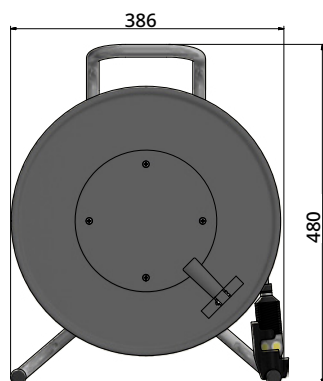

DEKRA Visatec GmbH
Gewerbepark 7
87477 Sulzberg/See Germany
Tel. + 49.8376.9215 0
info.dvg@dekra.com

dekra-visatec.com