



VT 3405 LED *lighting system* brochure



VT 3405 LED underwater lighting

Powerful LED lighting for additional illumination of the surrounding environments with high illumination in all directions

Applications

- ▶ Small and compact
- ▶ Multi-purpose
- ▶ High light output in a small format and in the smallest of spaces

Features

- ▶ High output in all directions
- ▶ Watertight up to 50 m
- ▶ Compact dimensions with only 34 mm diameter
- ▶ LED light continuously dimmable
- ▶ Various frames and holders available, according to customer needs





Technical specifications - VT 3405 LED underwater lighting system

This document is for general information only, please consult the system manual for detailed specifications

| | |
|-------------------------------|----------------------|
| Material | anodized aluminum |
| Dimension (ø x L) | 34x109 mm |
| Weight | 0.17 kg |
| Watertight | 5 bar / 50 m |
| Lighting | 6x LED |
| Luminous flux | ~ 510 lm each LED |
| Automatic overheat protection | automatic switch-off |
| Color temperaure | 4,000 K |
| Lighting beam | --- |
| Operating temperature water | --- |
| Operating temperature air | --- |
| Radiation tolerant | --- |
| Total dose | --- |
| Optionals | --- |

* unit in mm

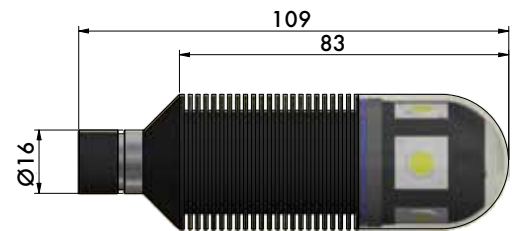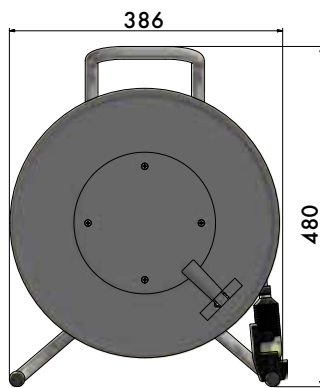

DEKRA Visatec GmbH
Gewerbepark 7, 87477 Sulzberg/See
Germany
Tel. + 49.8376.9215 0
info.dvg@dekra.com

www.dekra-visatec.com

