


Test report No:  
6196162.50

## TEST REPORT

### Electromagnetic Compatibility (EMC)

|   |  |
|---|--|
| Identification of item tested           | LED lamp   |
| Trademark                               |   |
| Model and /or type reference            | PY-R7S-4W-230-CCT-80-WPS-470<br>PY-R7S-4W-230-CCT-80-WPS-500<br>PY-R7S-5W-230-CCT-80-WPS-600<br>PY-R7S-8W-230-CCT-80-WPS-900<br>PY-R7S-9.5W-230-CCT-80-WPS-1100<br>PY-R7S-11W-230-CCT-80-WPS-1500          |
| Ratings                                 | 220-240 V~; 50 / 60 Hz; 4 -11 W; R7s   |
| Test Laboratory                         | DEKRA Testing and Certification (Shanghai) Ltd.<br>No.250, Jiangchangsan Road, Jing'an District, Shanghai, China   |
| Applicant's name / address              | Haining Puya Lighting Co.,LTD<br>186 Lianghong Road, Yuanhua Town, Haining City, Zhejiang, China   |
| Test method requested, standard         | EN IEC 55015:2019+A11:2020<br>EN 61547:2009<br>EN 61000-3-2:2014<br>EN 61000-3-3:2013+A1:2019<br>BS EN IEC 55015:2019+A11:2020<br>BS EN 61547:2009<br>BS EN 61000-3-2:2014<br>BS EN 61000-3-3:2013+A1:2019 |
| Verdict Summary                         | IN COMPLIANCE  |
| Tested by (name / position & signature) | Pengkun Shi<br>Project Engineer<br>   |

|   |                              |   |
|---|------------------------------|---|
| Approved by (name / position & signature) | Zuyao Fan<br>Project Manager |  |
| Date of issue                             | 2024-08-15                   |   |
| Report template No                        | TRF_EN55015_EN61547 EMC V1.2 |   |

## INDEX

---

|   | <b>page</b> |
|---|-------------|
| Competences and Guarantees.....                                       | 5           |
| General conditions.....   | 5           |
| Uncertainty.....  | 6           |
| Environmental conditions.....   | 6           |
| Possible test case verdicts .....                                     | 7           |
| Definition of symbols used in this test report.....                   | 7           |
| Abbreviations .....   | 7           |
| Document History .....  | 7           |
| Conclusion, Remarks and Comments .....                                | 8           |
| 1 General Information.....  | 9           |
| 1.1 General Description of the Item(s).....                           | 9           |
| 1.2 The environment(s) in which the EUT is intended to be used .....  | 12          |
| 1.3 Test data .....   | 12          |
| 2 Description of Test Setup.....                                      | 13          |
| 2.1 Operating mode(s) used for tests.....                             | 13          |
| 2.2 Port(s) of the EUT .....  | 13          |
| 2.3 Support / Auxiliary equipment / unit / software for the EUT ..... | 13          |
| 3 Verdict summary section .....                                       | 14          |
| 3.1 Standards .....   | 14          |
| 3.2 Deviation(s) from the Standard(s) / Test Specification(s) .....   | 14          |
| 3.3 Overview of results.....  | 15          |
| 4 Emission Test Results.....  | 16          |
| 4.1 Conducted disturbance at electric power supply interface .....    | 16          |
| 4.2 Radiated disturbances (9 KHz - 30 MHz).....                       | 21          |
| 4.3 Radiated disturbance (30 - 300 MHz) - CDNE method .....           | 23          |
| 4.4 Harmonic current emissions.....                                   | 26          |
| 4.5 Voltage changes, voltage fluctuations and flicker .....           | 27          |
| 5 Immunity Test Results.....  | 28          |
| 5.1 Classification according to EN 61547 .....                        | 28          |
| 5.2 Performance (Compliance) criteria .....                           | 28          |
| 5.2.1 Manufacturer defined performance criteria.....                  | 29          |
| 5.3 Monitored - Checked Functions / Parameters .....                  | 29          |
| 5.4 Electrostatic discharge immunity.....                             | 30          |
| 5.5 Radio-frequency electromagnetic fields immunity .....             | 31          |

|     |   |    |
|-----|---|----|
| 5.6 | Electrical Fast Transients immunity .....         | 32 |
| 5.7 | Surge transient immunity .....                    | 33 |
| 5.8 | Injected currents (RF common mode) immunity ..... | 35 |
| 5.9 | Power supply interruptions and dips immunity..... | 36 |
| 6   | Identification of the Equipment Under Test .....  | 37 |
| 7   | Annex 1 - Measurement Uncertainties .....         | 38 |
| 8   | Annex 2 - Used Equipment .....                    | 39 |
| 9   | Annex 3 - Test Photos .....                       | 43 |
| 10  | Annex 4 - Model list.....                         | 47 |

## COMPETENCES AND GUARANTEES

---

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

## GENERAL CONDITIONS

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.
5. The information provided by the customer in this report may affect the validity of the results, the test lab is not responsible for it.
6. The test results presented in this report relate only to the object tested.
7. Samples undergoing test have been provided by: The client.

## UNCERTAINTY

---

For all measurements where guidance for the calculation of the instrumentation uncertainty of a measurement is specified in EN 55016-4-2 (CISPR 16-4-2), EN/IEC 61000-4 series or a product standard, the measurement instrumentation uncertainty has been calculated and applied in accordance with these standards. For all other measurements where no guidance is available, the measurement instrumentation uncertainty has been calculated and applied in accordance with ISO/IEC Guide 98-3 document.

Uncertainties have been calculated according to the DEKRA internal document MU-EMC. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%. Refer to the Annex 1 for further information.

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements

## ENVIRONMENTAL CONDITIONS

---

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

|                       |                  |
|-----------------------|------------------|
| Ambient temperature   | 15 °C – 35 °C    |
| Relative Humidity air | 30% - 60%        |
| Atmospheric pressure  | 86 kPa – 106 kPa |

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

## POSSIBLE TEST CASE VERDICTS

|   |                 |
|---|-----------------|
| Test case does not apply to test object | N/A             |
| Test object does meet requirement       | P (Pass) / PASS |
| Test object does not meet requirement   | F (Fail) / FAIL |
| Not measured                            | N/M             |

## DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

|  |                          |           |   |
|--|--------------------------|-----------|---|
| <input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report/test/EUT. |                          |           |   |
| <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report/test/EUT.        |                          |           |   |
| Decimal separator used in this report  | <input type="checkbox"/> | Comma (,) | <input checked="" type="checkbox"/> Point (.) |

## ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

|       |   |                             |
|-------|---|-----------------------------|
| EUT   | : | Equipment Under Test        |
| QP    | : | Quasi-Peak                  |
| CAV   | : | CISPR Average               |
| AV    | : | Average                     |
| CDN   | : | Coupling Decoupling Network |
| SAC   | : | Semi-Anechoic Chamber       |
| OATS  | : | Open Area Test Site         |
| BW    | : | Bandwidth                   |
| AM    | : | Amplitude Modulation        |
| PM    | : | Pulse Modulation            |
| HCP   | : | Horizontal Coupling Plane   |
| VCP   | : | Vertical Coupling Plane     |
| $U_N$ | : | Nominal voltage             |
| N/A   | : | Not Applicable              |
| N/M   | : | Not Measured                |

## DOCUMENT HISTORY

| Report nr. | Date       | Description        |
|------------|------------|--------------------|
| 6113157.50 | 2021-10-18 | First release.     |
| 6196162.50 | 2024-08-15 | Amendment 1 report |
|            |            |                    |

## CONCLUSION, REMARKS AND COMMENTS

---

The equipment under test (EUT) does meet the requirements of the stated standard(s)/test(s).  
This report shall not be reproduced, except in full, without the written approval

All models have same electrical construction, circuit diagram and similar PCB layout but different temperature, length and wattage.

After review, all test were carried out on the following models PY-R7S-9.5W-230-CCT-80-WPS-1100. The test results stated in this report are also representative for models which can be derived using model list given in Annex 4.

### **Amendment 1 report:**

The report is issued to base on original test report Ref. No. 6113157.50 dated on 2021-10-18 including the following changes and additions, which were considered technical modifications:

- Add new mode.

After review, all test were carried out on the following model PY-R7S-11W-230-CCT-80-WPS-1500. The test results stated in this report are also representative for models which can be derived using model list given in Annex 4.

# 1 GENERAL INFORMATION

## 1.1 General Description of the Item(s)

|                                |  |
|--------------------------------|--|
| Description of the item .....  | LED lamp   |
| Test model / type number ..... | PY-R7S-9.5W-230-CCT-80-WPS-1100<br>PY-R7S-11W-230-CCT-80-WPS-1500                                |
| Serial number .....            | N/A  |
| Trademark.....                 |                 |
| Manufacturer.....              | Haining Puya Lighting Co.,LTD<br>186 Lianghong Road, Yuanhua Town, Haining City, Zhejiang, China |
| Factory .....                  | Haining Puya Lighting Co.,LTD<br>186 Lianghong Road, Yuanhua Town, Haining City, Zhejiang, China |

|                           |                                     |   |
|---------------------------|-------------------------------------|---|
| Type of the EUT .....     | <input type="checkbox"/>            | Luminaire   |
|                           | <input type="checkbox"/>            | Rope light (6.3)  |
|                           | <input type="checkbox"/>            | Internal Module (6.4.3)   |
|                           | <input type="checkbox"/>            | External module (6.4.4)   |
|                           | <input type="checkbox"/>            | Module having multiple applications (6.4.2)   |
|                           | <input checked="" type="checkbox"/> | Single capped self-ballasted lamp (6.4.5)   |
|                           | <input type="checkbox"/>            | Double-capped self-ballasted lamps, double-capped lamp adapters, double-capped semi-luminaires and double-capped retrofit lamps used in fluorescent lamp luminaires (6.4.6) |
|                           | <input type="checkbox"/>            | ELV lamps (6.4.7)   |
|                           | <input type="checkbox"/>            | Single-capped semi-luminaires (6.4.8)   |
|                           | <input type="checkbox"/>            | Independent igniter (6.4.9)   |
|                           | <input type="checkbox"/>            | Replaceable starters for fluorescent lamps (6.4.10)   |
| Control Gear used .....   | <input type="checkbox"/>            | Magnetic control gear / transformer   |
|                           | <input checked="" type="checkbox"/> | Electronic control gear   |
|                           | <input type="checkbox"/>            | Others:   |
| Lamp technology used..... | <input checked="" type="checkbox"/> | Light emitting diode (LED/OLED)   |
|                           | <input type="checkbox"/>            | High pressure discharge lamp (HID)  |
|                           | <input type="checkbox"/>            | Fluorescent lamp  |
|                           | <input type="checkbox"/>            | Tungsten halogen lamp   |
|                           | <input type="checkbox"/>            | Incandescent lamp   |
|                           | <input type="checkbox"/>            | Others:   |
| Dimming.....              | <input checked="" type="checkbox"/> | Test item has NO dimming functions  |
|                           | <input type="checkbox"/>            | Test item includes dimming functions other than phase control   |
|                           | <input type="checkbox"/>            | Test item includes phase control dimming functions  |

| Rated power supply .....            | Voltage and Frequency               |                                     | Reference poles          |                          |                          |                                     |                          |
|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|-------------------------------------|--------------------------|
|                                     |                                     |                                     | L1                       | L2                       | L3                       | N                                   | PE                       |
| <input checked="" type="checkbox"/> | AC: 220 – 240 V, 50/60 Hz           | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/>            | AC: 100 – 277 V, 50/60 Hz           | <input type="checkbox"/>            | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| <input type="checkbox"/>            | DC: 12 V, 24 V, 12 / 24 V           |                                     |                          |                          |                          |                                     |                          |
| <input type="checkbox"/>            | Battery:                            |                                     |                          |                          |                          |                                     |                          |
| Rated Power .....                   | 11 W                                |                                     |                          |                          |                          |                                     |                          |
| Clock frequencies .....             | < 30 MHz                            |                                     |                          |                          |                          |                                     |                          |
| Other parameters.....               | N/A                                 |                                     |                          |                          |                          |                                     |                          |
| Software version .....              | Not provided                        |                                     |                          |                          |                          |                                     |                          |
| Hardware version.....               | Not provided                        |                                     |                          |                          |                          |                                     |                          |
| Dimensions in cm (W x H x D).....   | < 300 x 100 x 100                   |                                     |                          |                          |                          |                                     |                          |
| Mounting position.....              | <input type="checkbox"/>            | Table top equipment                 |                          |                          |                          |                                     |                          |
|                                     | <input checked="" type="checkbox"/> | Wall/Ceiling mounted equipment      |                          |                          |                          |                                     |                          |
|                                     | <input type="checkbox"/>            | Floor standing equipment            |                          |                          |                          |                                     |                          |
|                                     | <input type="checkbox"/>            | Hand-held equipment                 |                          |                          |                          |                                     |                          |
|                                     | <input type="checkbox"/>            | Other                               |                          |                          |                          |                                     |                          |

| Intended use of the Equipment Under Test (EUT)   |
|--|
| The products are self-ballasted LED lamps with non-SELV driver and they are no-dimmable. |

| No | Module/parts of test item | Type | Manufacturer |
|----|---------------------------|------|--------------|
|    | N/A                       |      |              |
|    |                           |      |              |
|    |                           |      |              |

| No | Documents as provided by the applicant - Description | File name | Issue date |
|----|--|-----------|------------|
|    | N/A  |           |            |
|    |  |           |            |

| No. | Test model                      | Type  |
|-----|---------------------------------|-------|
| 1   | PY-R7S-9.5W-230-CCT-80-WPS-1100 | 9.5 W |
| 2   | PY-R7S-11W-230-CCT-80-WPS-1500  | 11 W  |
| 3   |                                 |       |
| 4   |                                 |       |
| 5   |                                 |       |
| 6   |                                 |       |

## 1.2 The environment(s) in which the EUT is intended to be used

The equipment under test (EUT) is intended to be used in the following environment(s):

|                                     |  |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | Residential (domestic) environment.          |
| <input checked="" type="checkbox"/> | Commercial and light-industrial environment. |
| <input type="checkbox"/>            | Industrial environment.                      |
| <input type="checkbox"/>            | Vehicular environment                        |

## 1.3 Test data

|                                 |  |
|---------------------------------|--|
| Location                        | DEKRA Testing and Certification (Shanghai) Ltd.                |
| Address                         | No.250, Jiangchangsang Road, Jing'an District, Shanghai, China |
| Date of receipt of test item    | 2021-08-20, 2024-07-24   |
| Date(s) of performance of tests | 2021-08-26 to 2021-09-01, 2024-07-26 to 2024-08-06             |

## 2 DESCRIPTION OF TEST SETUP

### 2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

| Operating mode | Operating mode description | Used for testing                    |                                     |
|----------------|----------------------------|-------------------------------------|-------------------------------------|
|                |                            | Emission                            | Immunity                            |
| 1              | Normal operating           | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 2              |                            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 3              |                            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 4              |                            | <input type="checkbox"/>            | <input type="checkbox"/>            |

Supplemental information:  
 1) All test was done at 230 Vac which is declared by the client.

### 2.2 Port(s) of the EUT

| Port name and description | Port name / description | Cable                       |                                     |                          |
|---------------------------|-------------------------|-----------------------------|-------------------------------------|--------------------------|
|                           |                         | Length used during test [m] | Attached during test                | Shielded                 |
| Wired network ports       | AC mains                | 0.8                         | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
|                           |                         |                             | <input type="checkbox"/>            | <input type="checkbox"/> |
|                           |                         |                             | <input type="checkbox"/>            | <input type="checkbox"/> |

Supplemental information:  
 ---

### 2.3 Support / Auxiliary equipment / unit / software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:

| Auxiliary equipment / unit / software | Type / Version | Manufacturer | Supplied by |
|---------------------------------------|----------------|--------------|-------------|
| N/A                                   |                |              |             |
|                                       |                |              |             |
|                                       |                |              |             |

Supplemental information:  
 ---

### 3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

#### 3.1 Standards

| Standard                   | Year                 | Description   |
|----------------------------|----------------------|---|
| EN IEC 55015<br>+A11       | 2019<br>2020         | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment   |
| EN 55016-2-1<br>+A1        | 2014<br>2017         | Methods of measurement of disturbances and immunity - Conducted disturbance measurements.   |
| EN 55016-2-3               | 2017                 | Methods of measurement of disturbances and immunity - Radiated disturbance measurements.  |
| EN 55032                   | 2015                 | Electromagnetic compatibility of multimedia equipment – Emission requirements.  |
| EN 61000-3-2               | 2014                 | Limits for harmonic current emissions (equipment input current $\leq 16$ A per phase).  |
| EN 61000-3-3<br>+A1        | 2013<br>2019         | Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16$ A per phase and not subject to conditional connection. |
| EN 61547                   | 2009                 | Equipment for general lighting purposes – EMC immunity requirements.  |
| EN 61000-4-2               | 2009                 | Electrostatic discharge immunity test.  |
| EN 61000-4-3<br>+A1<br>+A2 | 2006<br>2008<br>2009 | Radiated, radio-frequency, electromagnetic field immunity test.   |
| EN 61000-4-4               | 2004                 | Electrical fast transient/burst immunity test.  |
| EN 61000-4-5               | 2006                 | Surge immunity test.  |
| EN 61000-4-6               | 2009                 | Immunity to conducted disturbances, induced by radio-frequency fields.  |
| EN 61000-4-8               | 2008                 | Power frequency magnetic field immunity test.   |
| EN 61000-4-11              | 2004                 | Voltage dips, short interruptions and voltage variations immunity tests.  |

#### 3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards:

##### Summary of compliance with National Differences (List of countries addressed):

The product also fulfils the requirements of BS EN IEC 55015:2019+A11:2020, BS EN 61547:2009, BS EN 61000-3-2:2014, BS EN 61000-3-3:2013+A1:2019 which are for England and Wales and Scotland.

### 3.3 Overview of results

| EMISSION TESTS – EN IEC 55015   |                          |         |        |
|---|--------------------------|---------|--------|
| Requirement – Test case   | Basic Standard(s)        | Verdict | Remark |
| Conducted disturbance at electric power supply interface  | EN 55016-2-1             | PASS    | ---    |
| Conducted disturbance at wired network interfaces other than power supply   |                          | N/A     | ---    |
| Conducted disturbance at electric power supply interface of non-restricted ELV lamps  |                          | N/A     | ---    |
| Conducted disturbance at local wired ports other than electric power supply interface of ELV lamp   |                          | N/A     | ---    |
| Radiated disturbance (9 kHz to 30 MHz)  | EN IEC 55015             | PASS    | ---    |
| Radiated disturbance (30 MHz to 1 GHz)  | EN 55032<br>EN 55016-2-3 | PASS    | See 4) |
| <u>Supplementary information:</u>   |                          |         |        |
| 1) The EUT does not have an AC mains power input / output port.<br>2) Not applicable because no test requirements have been specified for DC/battery powered apparatus.<br>3) The frequency of the current supplying the lamp(s) is less than 100 Hz.<br>4) The CDNE method and the associated limits up to 300 MHz can be only applied for EUTs with clock frequencies below or equal to 30 MHz and the largest dimensions of the EUT are 3 m x 1 m x 1 m (l x w x h). |                          |         |        |

| EMISSION TESTS –EN 61000-3-2, EN 61000-3-3  |                   |         |        |
|---|-------------------|---------|--------|
| Requirement – Test case   | Basic Standard(s) | Verdict | Remark |
| Control principle shall be allowed for the application according to the clause  | EN 61000-3-2      | PASS    | ---    |
| Harmonic current emissions  | EN 61000-3-2      | PASS    | ---    |
| Voltage changes, voltage fluctuations and flicker   | EN 61000-3-3      | PASS    | ---    |
| <u>Supplementary information:</u>   |                   |         |        |
| 1) Since the rated power of the EUT is less than 75 Watts harmonics test is not applicable (clause 7, Figure 1).<br>2) The EUT is regarded as a professional equipment with a total rated power greater than 1 KW. The test is not applicable |                   |         |        |

| IMMUNITY TESTS – EN 61547   |                   |         |        |
|---|-------------------|---------|--------|
| Requirement – Test case   | Basic Standard(s) | Verdict | Remark |
| Electrostatic discharge   | EN 61000-4-2      | PASS    | ---    |
| Radio-frequency electromagnetic fields  | EN 61000-4-3      | PASS    | ---    |
| Fast transients   | EN 61000-4-4      | PASS    | ---    |
| Surge transient   | EN 61000-4-5      | PASS    | ---    |
| Injected currents (radio-frequency common mode)   | EN 61000-4-6      | PASS    | ---    |
| Power frequency magnetic fields   | EN 61000-4-8      | N/A     | See 2) |
| Voltage dips and short interruptions  | EN 61000-4-11     | PASS    | ---    |
| <u>Supplementary information:</u>   |                   |         |        |
| 1) Not applicable because no test requirements have been specified for DC/battery powered apparatus.<br>2) The apparatus does not contain any components susceptible to this low-frequency magnetic fields. |                   |         |        |

## 4 EMISSION TEST RESULTS

|            |   |                      |
|------------|---|----------------------|
| <b>4.1</b> | <b>Conducted disturbance at electric power supply interface</b> | <b>VERDICT: PASS</b> |
|------------|---|----------------------|

|                |              |
|----------------|--------------|
| Standard       | EN IEC 55015 |
| Basic standard | EN 55016-2-1 |

### Limits

| Frequency range [MHz] | Limit: QP [dB(μV) <sup>1)</sup> | Limit: AV [dB(μV) <sup>1)</sup> | IF BW  | Detector(s) |
|-----------------------|---------------------------------|---------------------------------|--------|-------------|
| 0.009 - 0.05          | 110                             | N/A                             | 200 Hz | QP          |
| 0.05 - 0.15           | 90 – 80 <sup>2)</sup>           | N/A                             | 200 Hz | QP          |
| 0.15 - 0.50           | 66 – 56 <sup>2)</sup>           | 56 - 46 <sup>2)</sup>           | 9 KHz  | QP, CAV     |
| 0.50 - 5.0            | 56 <sup>3)</sup>                | 46 <sup>3)</sup>                | 9 KHz  | QP, CAV     |
| 5.0 - 30              | 60                              | 50                              | 9 KHz  | QP, CAV     |

<sup>1)</sup> At the transition frequency, the lower limit applies.

<sup>2)</sup> The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.


<sup>3)</sup> For electrodeless lamps and luminaires, the limit in the frequency range of 2,51 MHz to 3,0 MHz is 73 dB(μV) quasi-peak and 63 dB(μV) average.

### Performed measurements

| Port under test                               |                                     | Terminal   |   |                                     |    |                          |    |                          |    |
|---|-------------------------------------|--|---|-------------------------------------|----|--------------------------|----|--------------------------|----|
| <input checked="" type="checkbox"/>           | AC mains input power                | <input checked="" type="checkbox"/>  | N | <input checked="" type="checkbox"/> | L1 | <input type="checkbox"/> | L2 | <input type="checkbox"/> | L3 |
| <input type="checkbox"/>                      | AC output power                     | <input type="checkbox"/>   | N | <input type="checkbox"/>            | L1 | <input type="checkbox"/> | L2 | <input type="checkbox"/> | L3 |
| Voltage – Mains [V]                           |                                     | 230 Vac  |   |                                     |    |                          |    |                          |    |
| Frequency – Mains [Hz]                        |                                     | 50 Hz  |   |                                     |    |                          |    |                          |    |
| Test method applied                           | <input checked="" type="checkbox"/> | Artificial mains network   |   |                                     |    |                          |    |                          |    |
|   | <input type="checkbox"/>            | Voltage probe  |   |                                     |    |                          |    |                          |    |
| Test setup                                    | <input checked="" type="checkbox"/> | Set-up Type A<br>(40 cm distance to vertical ground plane, 80 cm o ground plane)   |   |                                     |    |                          |    |                          |    |
|   | <input type="checkbox"/>            | Set-up Type B (40 cm distance to horizontal ground plane)  |   |                                     |    |                          |    |                          |    |
|   | <input type="checkbox"/>            | Floor standing equipment set-up (10 cm over ground plane)  |   |                                     |    |                          |    |                          |    |
|   | <input type="checkbox"/>            | Other:   |   |                                     |    |                          |    |                          |    |
|   | <input type="checkbox"/>            | Artificial hand applied (See photo)  |   |                                     |    |                          |    |                          |    |
| Refer to the Annex 3 for test setup photo(s). |                                     |  |   |                                     |    |                          |    |                          |    |
| Operating mode(s) used                        |                                     | Mode 1   |   |                                     |    |                          |    |                          |    |
| Remark  |                                     | The RF disturbance level was investigated at all operating modes listed at chapter 2.1 respectively. The worst case results were reported. |   |                                     |    |                          |    |                          |    |

See next page.


|   |                                     |                          |                          |         |
|---|-------------------------------------|--------------------------|--------------------------|---------|
| Measurement data  | <input checked="" type="checkbox"/> | Line                     | <input type="checkbox"/> | Neutral |
| Operating mode / voltage / frequency used during the test |                                     | Mode 1 / 230 Vac / 50 Hz |                          |         |
| Port under test   |                                     | AC mains input port      |                          |         |
| Model: 1  |                                     |                          |                          |         |

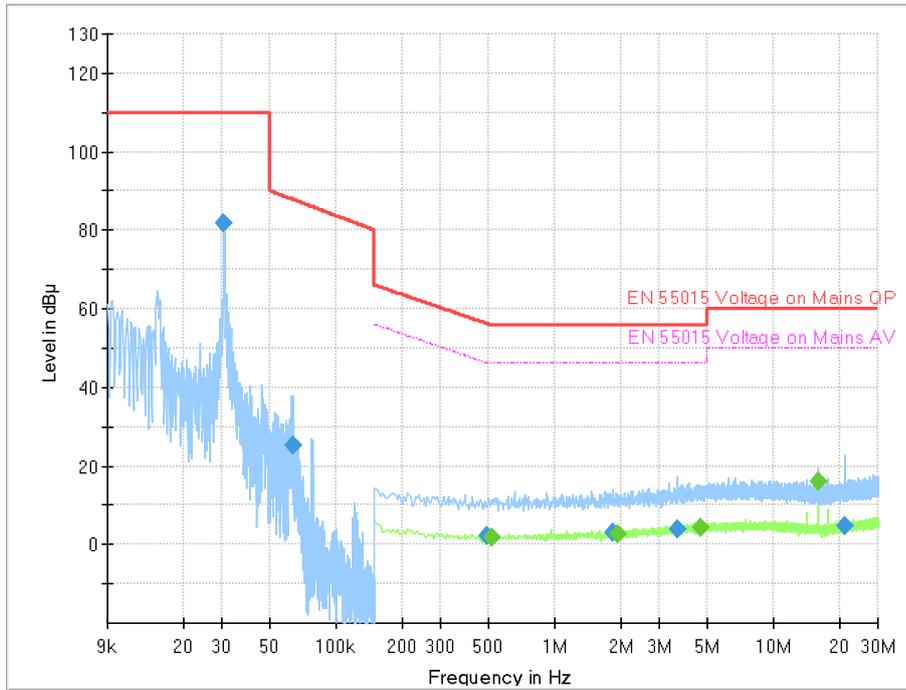

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|------------|
| 0.030700        | 81.78                  | ---                  | 110.00             | 28.22       | 9.9        |
| 0.063100        | 25.42                  | ---                  | 87.88              | 62.46       | 9.7        |
| 0.492000        | 2.32                   | ---                  | 56.13              | 53.82       | 9.6        |
| 0.514500        | ---                    | 1.91                 | 46.00              | 44.09       | 9.6        |
| 1.837500        | 2.88                   | ---                  | 56.00              | 53.12       | 9.6        |
| 1.954500        | ---                    | 2.54                 | 46.00              | 43.46       | 9.6        |
| 3.633000        | 3.99                   | ---                  | 56.00              | 52.01       | 9.7        |
| 4.600500        | ---                    | 4.28                 | 46.00              | 41.72       | 9.7        |
| 15.999000       | ---                    | 16.02                | 50.00              | 33.98       | 10.0       |
| 21.030000       | 4.58                   | ---                  | 60.00              | 55.42       | 10.3       |

Remark

|   |                          |                          |                                     |         |
|---|--------------------------|--------------------------|-------------------------------------|---------|
| Measurement data  | <input type="checkbox"/> | Line                     | <input checked="" type="checkbox"/> | Neutral |
| Operating mode / voltage / frequency used during the test |                          | Mode 1 / 230 Vac / 50 Hz |                                     |         |
| Port under test   |                          | AC mains input port      |                                     |         |
| Model: 1  |                          |                          |                                     |         |

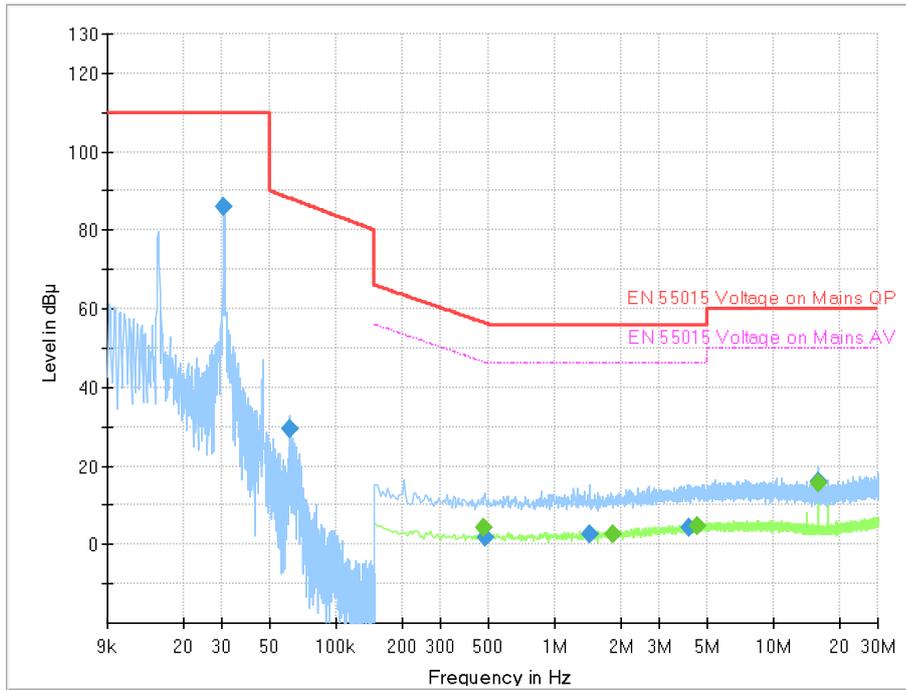


| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|------------|
| 0.030700        | 85.88                  | ---                  | 110.00             | 24.12       | 9.8        |
| 0.061400        | 29.45                  | ---                  | 88.13              | 58.68       | 9.5        |
| 0.469500        | ---                    | 4.25                 | 46.52              | 42.28       | 9.6        |
| 0.483000        | 1.85                   | ---                  | 56.29              | 54.44       | 9.6        |
| 1.450500        | 2.67                   | ---                  | 56.00              | 53.33       | 9.6        |
| 1.846500        | ---                    | 2.47                 | 46.00              | 43.53       | 9.6        |
| 4.119000        | 4.48                   | ---                  | 56.00              | 51.52       | 9.7        |
| 4.479000        | ---                    | 4.76                 | 46.00              | 41.24       | 9.7        |
| 15.999000       | ---                    | 15.77                | 50.00              | 34.23       | 10.0       |
| 15.999000       | 15.86                  | ---                  | 60.00              | 44.14       | 10.0       |

Remark

|   |                                     |                          |                          |         |
|---|-------------------------------------|--------------------------|--------------------------|---------|
| Measurement data  | <input checked="" type="checkbox"/> | Line                     | <input type="checkbox"/> | Neutral |
| Operating mode / voltage / frequency used during the test |                                     | Mode 1 / 230 Vac / 50 Hz |                          |         |
| Port under test   |                                     | AC mains input port      |                          |         |


Model: 2

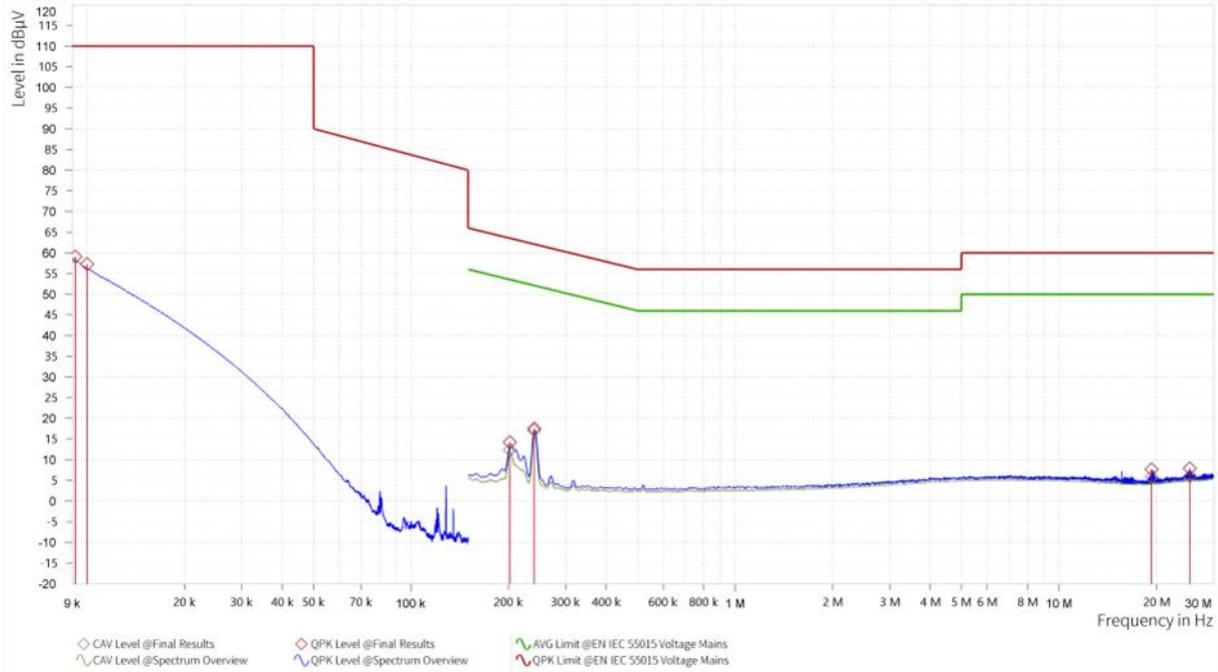

| Frequency [MHz] | QPK Level [dBµV] | QPK Limit [dBµV] | QPK Margin [dB] | CAV Level [dBµV] | CAV: AVG Limit [dBµV] | CAV Margin [dB] | Correction [dB] |
|-----------------|------------------|------------------|-----------------|------------------|-----------------------|-----------------|-----------------|
| 0.009           | 59.07            | 110.00           | 50.93           |                  |                       |                 | 9.74            |
| 0.010           | 57.27            | 110.00           | 52.73           |                  |                       |                 | 9.74            |
| 0.202           | 14.23            | 63.54            | 49.30           | 12.33            | 53.54                 | 41.20           | 9.82            |
| 0.240           | 17.55            | 62.10            | 44.54           | 17.03            | 52.10                 | 35.07           | 9.82            |
| 19.304          | 7.63             | 60.00            | 52.37           | 5.82             | 50.00                 | 44.18           | 10.01           |
| 25.312          | 7.91             | 60.00            | 52.09           | 5.96             | 50.00                 | 44.04           | 10.01           |

Remark

|   |                          |                          |                                     |         |
|---|--------------------------|--------------------------|-------------------------------------|---------|
| Measurement data  | <input type="checkbox"/> | Line                     | <input checked="" type="checkbox"/> | Neutral |
| Operating mode / voltage / frequency used during the test |                          | Mode 1 / 230 Vac / 50 Hz |                                     |         |
| Port under test   |                          | AC mains input port      |                                     |         |
| Model: 2  |                          |                          |                                     |         |

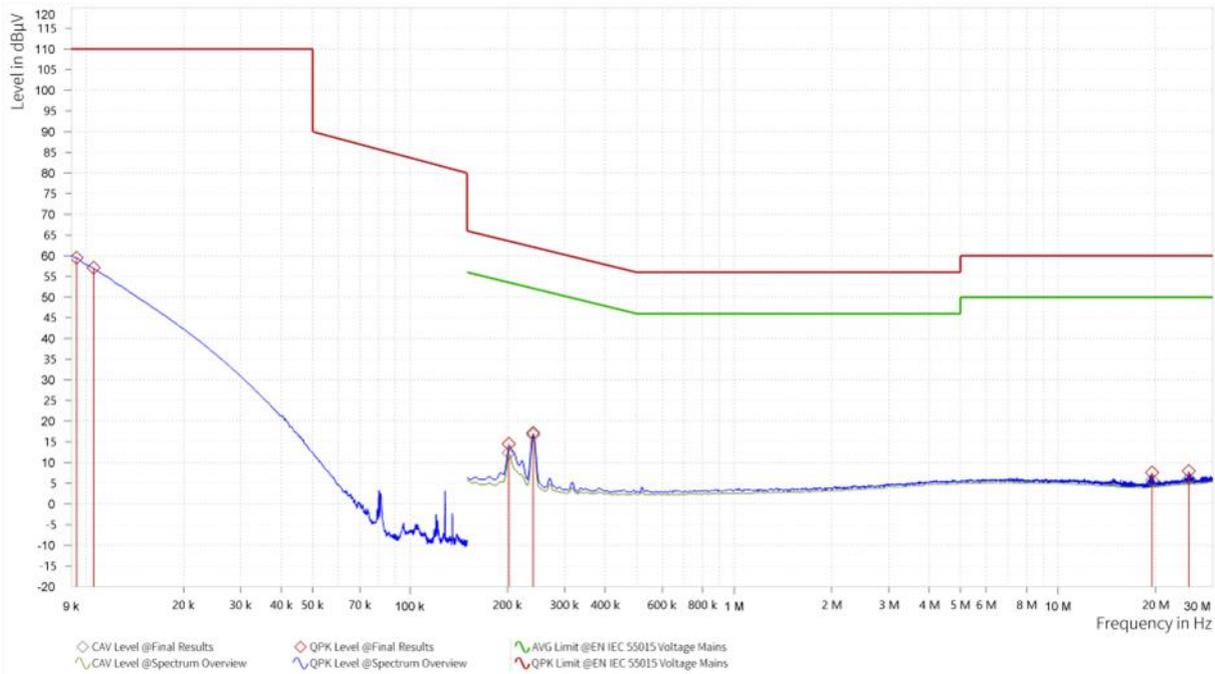

| Frequency [MHz] | QPK Level [dBµV] | QPK Limit [dBµV] | QPK Margin [dB] | CAV Level [dBµV] | CAV: AVG Limit [dBµV] | CAV Margin [dB] | Correction [dB] |
|-----------------|------------------|------------------|-----------------|------------------|-----------------------|-----------------|-----------------|
| 0.009           | 59.52            | 110.00           | 50.48           |                  |                       |                 | 9.72            |
| 0.011           | 57.11            | 110.00           | 52.89           |                  |                       |                 | 9.72            |
| 0.202           | 14.51            | 63.54            | 49.03           | 12.34            | 53.54                 | 41.19           | 9.84            |
| 0.240           | 17.19            | 62.10            | 44.90           | 16.70            | 52.10                 | 35.39           | 9.84            |
| 19.507          | 7.60             | 60.00            | 52.40           | 5.71             | 50.00                 | 44.29           | 9.97            |
| 25.312          | 7.98             | 60.00            | 52.02           | 6.02             | 50.00                 | 43.98           | 9.99            |

Remark

|   |                      |
|---|----------------------|
| <b>4.2 Radiated disturbances (9 KHz – 30 MHz)</b> | <b>VERDICT: PASS</b> |
|---|----------------------|

|                |  |
|----------------|--|
| Standard       | EN IEC 55015                             |
| Basic standard | EN 55016-2-3                             |
| Test method    | Large Loop Antenna (LLA) or Loop antenna |

**Limits LLA- D ≤ 1.6m**

| Frequency range [MHz] | Limit: QP [dB(μV/m) <sup>1)</sup> | IF BW  | Detector(s)     |
|-----------------------|-----------------------------------|--------|-----------------|
| 0.009 - 0.07          | 88                                | 200 Hz | Quasi-Peak (QP) |
| 0.07 - 0.15           | 88 – 58 <sup>2)</sup>             | 200 Hz | Quasi-Peak (QP) |
| 0.15 - 2.2            | 58 – 22 <sup>2)</sup>             | 9 KHz  | Quasi-Peak (QP) |
| 2.2 - 3.0             | 58 <sup>3)</sup>                  | 9 KHz  | Quasi-Peak (QP) |
| 3.0 - 30              | 22                                | 9 KHz  | Quasi-Peak (QP) |

<sup>1)</sup> At the transition frequency, the lower limit applies.

<sup>2)</sup> The limit decreases linearly with the logarithm of the frequency.

<sup>3)</sup> For lighting equipment incorporating exclusively electrodeless lamps, the limit applies.

**Performed measurements**

|  |  |   |
|--|--|---|
| Port under test                                    | Enclosure  |   |
| Voltage – Mains [V]                                | 230 Vac  |   |
| Frequency – Mains [Hz]                             | 50 Hz  |   |
| Applied Limit for antenna measurement (Table 9)    | <input type="checkbox"/>   | Loop antenna radiated disturbance limit 9 kHz – 30 MHz for equipment with a dimension > 1.6 m |
| Applied limit according to LLAS diameter (Table 8) | <input checked="" type="checkbox"/>  | 2 m for equipment length not exceeding 1.6m   |
|  | <input type="checkbox"/>   | 3 m for equipment length between 1.6 m and 2.6 m  |
|  | <input type="checkbox"/>   | 4 m for equipment length between 2.6 m and 3.6 m  |
| Test setup   | <input checked="" type="checkbox"/>  | Equipment placed in the centre of the LLAS  |
|  | <input type="checkbox"/>   | Equipment on a table 80 cm height   |
|  | <input type="checkbox"/>   | Equipment on the floor (isolated from ground plane)   |
|  | <input type="checkbox"/>   | Other: --   |
| Refer to the Annex 3 for test setup photo(s).      |  |   |
| Operating mode(s) used                             | Mode 1   |   |
| Remark   | The RF disturbance level was investigated at all operating modes listed at chapter 2.1 respectively. The worst case results were reported. |   |

See next page.

| Measurement data  |   | <input checked="" type="checkbox"/> X-axis | <input checked="" type="checkbox"/> Y-axis | <input checked="" type="checkbox"/> Z-axis |
|---|---|--|--|--|
| Operating mode / voltage / frequency used during the test   |   | Mode 1 / 230 Vac / 50 Hz                   |  |  |
| Model: 1, 2   |   |  |  |  |
| Frequency [MHz]   |   | QP [dB(μV)]                                |  |  |
|   |   | Level                                      | Limit                                      |  |
| 0.009 - 30  |   | More than 20 dB<br>below the limit         |  |  |
| No significant emissions were recorded at the frequency range of interest employing the QP detectors. |   |  |  |  |
| Remark  | The given graph is the combination of max-hold function |  |  |  |

|  |                      |
|--|----------------------|
| <b>4.3 Radiated disturbance (30 – 300 MHz) - CDNE method</b> | <b>VERDICT: PASS</b> |
|--|----------------------|

|                |              |
|----------------|--------------|
| Standard       | EN IEC 55015 |
| Basic standard | EN 55016-2-1 |
| Test method    | CDNE method  |

### Limits

| Frequency [MHz] | Limit: QP [dB(μV) <sup>1)</sup> | IF BW   | Detector(s)     |
|-----------------|---------------------------------|---------|-----------------|
| 30 – 100        | 64 – 54 <sup>2)</sup>           | 120 KHz | Quasi-Peak (QP) |
| 100 – 230       | 54                              | 120 KHz | Quasi-Peak (QP) |
| 230 – 300       | 54 – 51 <sup>2)</sup>           | 120 KHz | Quasi-Peak (QP) |


<sup>1)</sup> At the transition frequency, the lower limit applies.  
<sup>2)</sup> The limit decreases linearly with the logarithm of the frequency.

### Performed measurements

|                           |  |                         |                          |                  |
|---------------------------|--|-------------------------|--------------------------|------------------|
| Tested terminal(s) / port | <input checked="" type="checkbox"/>  | AC mains input terminal | <input type="checkbox"/> | Control terminal |
|                           | <input type="checkbox"/>   | DC mains input terminal | <input type="checkbox"/> | Load terminal    |
|                           | <input type="checkbox"/>   | Other:                  |                          |                  |
| Voltage – Mains [V]       | 230 Vac  |                         |                          |                  |
| Frequency – Mains [Hz]    | 50 Hz  |                         |                          |                  |
| Test setup                | Equipment on a 10 cm support over the ground plane according CDNE-Method   |                         |                          |                  |
| Operating mode(s) used    | Mdoe 1   |                         |                          |                  |
| Remark                    | The RF disturbance level was investigated at all operating modes listed at chapter 2.1 respectively. The worst case results were reported. |                         |                          |                  |

See next page.

|   |                 |                          |
|---|-----------------|--------------------------|
| Measurement data  | Port under test | AC mains input port      |
| Operating mode / voltage / frequency used during the test |                 | Mode 1 / 230 Vac / 50 Hz |
| Model: 1  |                 |                          |

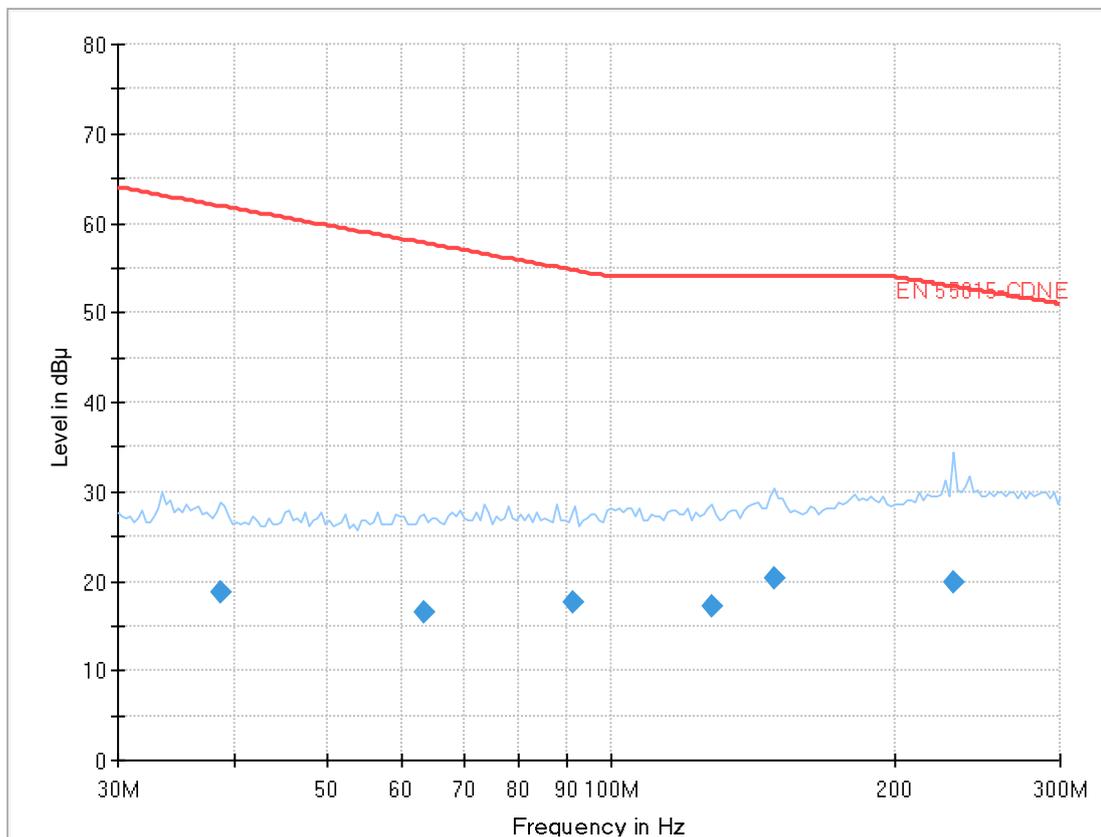


| Frequency (MHz) | QuasiPeak (dBμV) | Limit (dBμV) | Margin (dB) | Corr. (dB) |
|-----------------|------------------|--------------|-------------|------------|
| 38.472960       | 18.72            | 61.93        | 43.22       | 19.7       |
| 63.273854       | 16.47            | 57.80        | 41.33       | 19.7       |
| 91.315558       | 17.70            | 54.76        | 37.05       | 19.8       |
| 128.365409      | 17.19            | 54.00        | 36.81       | 20.0       |
| 148.888939      | 20.36            | 54.00        | 33.64       | 20.1       |
| 230.676249      | 19.78            | 52.94        | 33.16       | 20.9       |

|        |   |
|--------|---|
| Remark | The given graph is the combination of max-hold function |
|--------|---|

|   |                 |                          |
|---|-----------------|--------------------------|
| Measurement data  | Port under test | AC mains input port      |
| Operating mode / voltage / frequency used during the test |                 | Mode 1 / 230 Vac / 50 Hz |

Model: 1

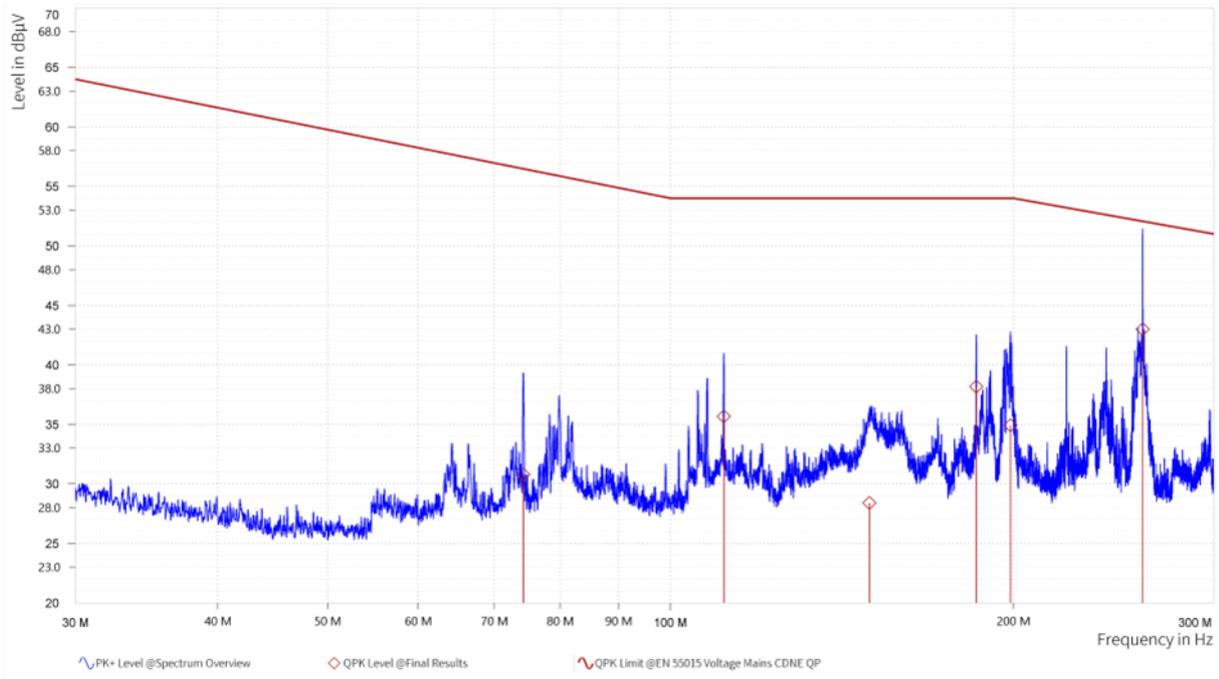

| Frequency [MHz] | QPK Level [dBµV] | QPK Limit [dBµV] | QPK Margin [dB] | Correction [dB] |
|-----------------|------------------|------------------|-----------------|-----------------|
| 74.250          | 30.78            | 56.47            | 25.69           | 21.05           |
| 111.360         | 35.67            | 54.00            | 18.33           | 20.70           |
| 149.550         | 28.40            | 54.00            | 25.60           | 20.28           |
| 185.610         | 38.17            | 54.00            | 15.83           | 21.12           |
| 198.900         | 34.92            | 54.00            | 19.08           | 21.04           |
| 259.860         | 43.01            | 52.06            | 9.06            | 20.35           |

Remark | The given graph is the combination of max-hold function

|                                       |                      |
|---------------------------------------|----------------------|
| <b>4.4 Harmonic current emissions</b> | <b>VERDICT: PASS</b> |
|---------------------------------------|----------------------|

|  |                          |  |  |
|--|--------------------------|--|--|
| Standard   | EN 61000-3-2             |  |  |
| Exclusions<br>(For these categories of equipment, limits are not specified in the EN 61000-3-2 standard) | <input type="checkbox"/> |  | Arc welding equipment intended for professional use.                               |
|  | <input type="checkbox"/> |  | System(s) with nominal voltage(s) less than 220 V <sub>AC</sub> (line-to-neutral). |
|  | <input type="checkbox"/> |  | Equipment with rated power of ≤ 75 W (other than lighting equipment).              |
|  | <input type="checkbox"/> |  | Professional equipment with total rated power > 1 kW.                              |
|  | <input type="checkbox"/> |  | Symmetrically controlled heating elements with a rated power ≥ 200 W.              |
|  | <input type="checkbox"/> |  | Independent dimmers for incandescent lamps with rated power ≤ 1 kW.                |

|                          |         |   |  |
|--------------------------|---------|---|--|
| Classification           |         |   |  |
| <input type="checkbox"/> | Class A | All apparatus not classified as Class B, C or D |  |
| <input type="checkbox"/> | Class B | Portable tools                                  |  |
| <input type="checkbox"/> | Class C | <input type="checkbox"/>                        | Lighting equipment with active input power > 25 W  |
|                          |         | <input type="checkbox"/>                        | Lighting equipment with active input power ≤ 25 W<br>(First requirement, Table 3 column 2) |
|                          |         | <input type="checkbox"/>                        | Lighting equipment with active input power ≤ 25 W (Second requirement)                     |
| <input type="checkbox"/> | Class D | Personal computers, television receivers        |  |

**Performed measurements**

|  |                                     |  |                          |          |                          |        |
|--|-------------------------------------|--|--------------------------|----------|--------------------------|--------|
| Reason for not performing the measurement(s)                                 | <input checked="" type="checkbox"/> | For lighting equipment other than discharge lighting equipment with a rated power less than 25 Watt, no limits apply. Testing is not required. |                          |          |                          |        |
| Port under test  | N/A                                 |  |                          |          |                          |        |
| Voltage – Mains [V]  | N/A                                 |  |                          |          |                          |        |
| Frequency – Mains [Hz]   | N/A                                 |  |                          |          |                          |        |
| Observation period   | <input type="checkbox"/>            | 6.5 min.   | <input type="checkbox"/> | 2.5 min. | <input type="checkbox"/> | Other: |
| Version of measurement instrument standard used<br>EN / IEC61000-4-7 (Cl. 7) | <input type="checkbox"/>            | EN 61000-4-7:2002 + AM1:2009 (IEC 61000-4-7:2002+AM1:2008)   |                          |          |                          |        |
|  | <input type="checkbox"/>            | EN 61000-4-7:1991  |                          |          |                          |        |
| Control principle used in the EUT  | <input type="checkbox"/>            | Comply with the requirements of the Clause 6.1 (EN / IEC 61000-3-2).   |                          |          |                          |        |
|  | <input type="checkbox"/>            | Not comply with the requirements of the Clause 6.1 (EN / IEC 61000-3-2).   |                          |          |                          |        |
| Operating mode(s) used   | N/A                                 |  |                          |          |                          |        |
| Remark   | ---                                 |  |                          |          |                          |        |

See next page.

|  |                      |
|--|----------------------|
| <b>4.5 Voltage changes, voltage fluctuations and flicker</b> | <b>VERDICT: PASS</b> |
|--|----------------------|

|          |              |
|----------|--------------|
| Standard | EN 61000-3-3 |
|----------|--------------|

**Limits**

|   |                                     |               |                                     |                |
|---|-------------------------------------|---------------|-------------------------------------|----------------|
| $P_{ST}$ (Short term flicker) <sup>1)</sup> | <input type="checkbox"/>            | $\leq 1$      | <input checked="" type="checkbox"/> | Not Applicable |
| $P_{LT}$ (Long term flicker) <sup>1)</sup>  | <input type="checkbox"/>            | $\leq 0.65$   | <input checked="" type="checkbox"/> | Not Applicable |
| $T_{max}$ ( $d_t > 3.3\%$ )                 | <input checked="" type="checkbox"/> | $\leq 500$ ms | <input type="checkbox"/>            | Not Applicable |
| $d_c$ (Relative Voltage change)             | <input checked="" type="checkbox"/> | $\leq 3.3\%$  | <input type="checkbox"/>            | Not Applicable |
| $d_{MAX}$ (Max. voltage change)             | <input checked="" type="checkbox"/> | $\leq 4\%$    | <input type="checkbox"/>            | 6%             |
|   | <input type="checkbox"/>            | 7%            | <input type="checkbox"/>            | Not Applicable |

Supplemental information:

1)  $P_{ST}$  and  $P_{LT}$  evaluations are required only for lighting equipment which is likely to produce multiple voltage fluctuations which in turn can cause flicker of other lighting equipment, for example due to fast varying or switching of significant loads inside the lighting equipment.

**Performed measurements**

|  |                                     |  |                          |          |                          |        |
|--|-------------------------------------|--|--------------------------|----------|--------------------------|--------|
| Reason for not performing the measurement(s) | <input checked="" type="checkbox"/> | Incandescent lamp luminaires with ratings less than or equal to 1 000 W and discharge and LED lamp luminaires with ratings less than or equal to 600 W, are deemed to comply with the $d_c$ , $d_{MAX}$ and $T_{max}$ limits |                          |          |                          |        |
| Port under test                              | N/A                                 |  |                          |          |                          |        |
| Voltage – Mains [V]                          | N/A                                 |  |                          |          |                          |        |
| Frequency – Mains [Hz]                       | N/A                                 |  |                          |          |                          |        |
| Test method                                  | <input type="checkbox"/>            | Flickermeter according EN / IEC 61000-4-15:2011  |                          |          |                          |        |
|  | <input type="checkbox"/>            | Simulation (Clause 4.2.3 of EN / IEC 61000-3-3)  |                          |          |                          |        |
|  | <input type="checkbox"/>            | Analytical method (Clause 4.2.4 of EN / IEC 61000-3-3)   |                          |          |                          |        |
|  | <input type="checkbox"/>            | Use of $P_{st} = 1$ curve (Clause 4.2.5 of EN / IEC 61000-3-3)   |                          |          |                          |        |
| Observation period                           | <input type="checkbox"/>            | 10 min.  | <input type="checkbox"/> | 120 min. | <input type="checkbox"/> | Other: |
|  | <input type="checkbox"/>            | 24 times switching according to Annex B  |                          |          |                          |        |
| Operating mode(s) used                       | N/A                                 |  |                          |          |                          |        |
| Remark                                       | ---                                 |  |                          |          |                          |        |

See next page.

## 5 IMMUNITY TEST RESULTS

### 5.1 Classification according to EN 61547

The immunity test requirements apply to the following lighting equipment:

|                                     |   |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | Self-ballasted lamps and semi-luminaires.                           |
| <input type="checkbox"/>            | Independent auxiliaries.  |
| <input type="checkbox"/>            | Luminaires or equivalent appliances (including emergency lighting). |

### 5.2 Performance (Compliance) criteria

[According to EN 61547]

Performance criteria A : During the test no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended. The luminous intensity shall be deemed to be unchanged if the measured intensities do not deviate by more than 15 %.

Performance criteria B : During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criteria C : During and after the test any change of luminous intensity is allowed and the lamp(s) may be extinguished. After the test, within 30 min, all functions shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control.

| Product                             |   | Test (subclause – of this document) and performance criteria |             |                 |                 |                |             |                             |                   |
|-------------------------------------|---|--|-------------|-----------------|-----------------|----------------|-------------|-----------------------------|-------------------|
|                                     |   | 6.1<br>(ESD)   | 6.2<br>(RI) | 6.3<br>(EFT)    | 6.4<br>(Surge)  | 6.5<br>(RF-CI) | 6.6<br>(MI) | 6.7<br>(Dips&Interruptions) |                   |
|                                     |   |  |             |                 |                 |                |             | Dips                        | Interruption      |
| <input checked="" type="checkbox"/> | Self-ballasted lamps                            | B  | A           | B               | C               | A              | A           | C                           | B                 |
| <input type="checkbox"/>            | Independent electronic auxiliary <sup>4)</sup>  | B  | A           | B               | C               | A              | A           | C                           | B <sup>1)</sup>   |
| <input type="checkbox"/>            | Luminaire including active electronic component | B  | A           | B               | C               | A              | A           | C                           | B <sup>1)</sup>   |
| <input type="checkbox"/>            | Luminaire for emergency lighting <sup>5)</sup>  | B <sup>2)</sup>  | A           | B <sup>2)</sup> | B <sup>2)</sup> | A              | A           | See <sup>3)</sup>           | See <sup>3)</sup> |

#### Supplementary information:

- <sup>1)</sup> For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.
- <sup>2)</sup> For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0.5 s.
- <sup>3)</sup> These tests do not apply as they are covered by the test in IEC 60598-2-22.
- <sup>4)</sup> These tests apply for built-in auxiliaries which set for independent auxiliaries
- <sup>5)</sup> Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.

5.2.1 **Manufacturer defined performance criteria**

Not provided.

**5.3 Monitored – Checked Functions / Parameters**

During the immunity tests the following functions of the EUT has/have been monitored/checked.

|  |  |
|--|--|
| <input type="checkbox"/> Motor speed             | <input type="checkbox"/> Display data              |
| <input type="checkbox"/> Switching               | <input type="checkbox"/> Data storage              |
| <input type="checkbox"/> Standby mode            | <input type="checkbox"/> Sensor functions          |
| <input type="checkbox"/> Temperature             | <input type="checkbox"/> Audible signals           |
| <input type="checkbox"/> Power consumption       | <input checked="" type="checkbox"/> Others : LED's |
| <input type="checkbox"/> AC mains input current  | <input type="checkbox"/> Others :                  |
| <input type="checkbox"/> Timing                  | <input type="checkbox"/> Others :                  |
| <input checked="" type="checkbox"/> Illumination | <input type="checkbox"/> Others :                  |
| <u>Supplementary information :</u>               |  |
| =  |  |

| Immunity test  | Monitored - Checked function(s)/parameter(s) during / after the test | Method                      |
|--|--|-----------------------------|
| Electrostatic discharge  | Illumination   | Visual observation          |
| Radio-frequency electromagnetic fields   | Illumination   | Visual observation / Camera |
| Fast transients  | Illumination   | Visual observation          |
| Surge transient  | Illumination   | Visual observation          |
| Injected currents (radio-frequency common mode)  | Illumination   | Visual observation          |
| Voltage dips and short interruptions   | Illumination   | Visual observation          |
| <u>Supplementary information :</u>   |  |                             |
| In case of doubt, the luminous intensity shall be deemed to be unchanged if the measured intensities do not deviate by more than 15 %. |  |                             |

|   |                      |
|---|----------------------|
| <b>5.4 Electrostatic discharge immunity</b> | <b>VERDICT: PASS</b> |
|---|----------------------|

Electrostatic discharges (ESD) are the result of persons or objects that accumulate static electricity due to for instance walking on synthetic carpets. The ESD can influence the operation of equipment or damage its electronics, either by a direct discharge or indirectly by coupling or radiation. Both effects are simulated during the tests.

**Requirements**

|                      |  |       |                                     |       |                                     |       |                          |    |
|----------------------|--|-------|-------------------------------------|-------|-------------------------------------|-------|--------------------------|----|
| Standard             | EN 61547                                 |       |                                     |       |                                     |       |                          |    |
| Basic standard       | EN 61000-4-2                             |       |                                     |       |                                     |       |                          |    |
| Port under test      | Enclosure                                |       |                                     |       |                                     |       |                          |    |
| Air discharges       | <input checked="" type="checkbox"/>      | ±2 kV | <input checked="" type="checkbox"/> | ±4 kV | <input checked="" type="checkbox"/> | ±8 kV | <input type="checkbox"/> | kV |
| Contact discharges   | <input type="checkbox"/>                 | ±2 kV | <input checked="" type="checkbox"/> | ±4 kV | <input type="checkbox"/>            | ±8 kV | <input type="checkbox"/> | kV |
| Number of discharges | ≥ 10 per polarity with ≥ 1 sec interval. |       |                                     |       |                                     |       |                          |    |

**Performed tests**

|                          |                                     |           |                           |                |
|--------------------------|-------------------------------------|-----------|---------------------------|----------------|
| Set-up                   | <input checked="" type="checkbox"/> | Table-top | <input type="checkbox"/>  | Floor standing |
| Ambient temperature [°C] | 22.0                                |           | Relative Humidity air [%] | 45.9           |
| Voltage – Mains [V]      | 230 Vac                             |           |                           |                |
| Frequency – Mains [Hz]   | 50 Hz                               |           |                           |                |
| Operating mode(s) used   | Mode 1                              |           |                           |                |

|                                     | Test Point<br>(Location of discharge)              | Test Voltage [kV]<br>& Polarity | Coupling<br>type | # of applied<br>discharges / polarity | Discharge<br>interval [s] |
|-------------------------------------|--|---------------------------------|------------------|---------------------------------------|---------------------------|
| <input checked="" type="checkbox"/> | Points on conductive surface touchable by hand     | ±2, ±4                          | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | Points on non-conductive surface touchable by hand | ±2, ±4, ±8                      | Air              | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | HCP top side.                                      | ±4                              | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | HCP bottom side.                                   | ±4                              | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | VCP right side.                                    | ±4                              | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | VCP left side.                                     | ±4                              | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | VCP front side.                                    | ±4                              | Contact          | 10                                    | 1                         |
| <input checked="" type="checkbox"/> | VCP rear side.                                     | ±4                              | Contact          | 10                                    | 1                         |

|                |   |
|----------------|---|
| Observation(s) | During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance or data was observed. |
|----------------|---|

Supplementary information:  
 ---

|            |  |                      |
|------------|--|----------------------|
| <b>5.5</b> | <b>Radio-frequency electromagnetic fields immunity</b> | <b>VERDICT: PASS</b> |
|------------|--|----------------------|

During the test it is verified if the equipment under test (EUT) has sufficient immunity against radiated electromagnetic fields. Industrial electromagnetic sources, walkie-talkies, radio transmitters, television transmitters and telecommunication equipment including cellular telephones and other emitting devices can generate these fields.

**Requirements**

|                                   |              |               |            |           |
|-----------------------------------|--------------|---------------|------------|-----------|
| Standard                          | EN 61547     |               |            |           |
| Basic standard                    | EN 61000-4-3 |               |            |           |
| Port under test                   | Enclosure    |               |            |           |
| Frequency range                   | Test level   | Modulation    | Dwell time | Step size |
| 80 – 1000 MHz                     | 3 V/m        | 80% AM (1kHz) | ≥ 0.5 s    | ≤ 1%      |
| <u>Supplementary information:</u> |              |               |            |           |
| --                                |              |               |            |           |

**Performed tests**

|  |   |  |                                     |                         |                                     |        |
|--|---|--|-------------------------------------|-------------------------|-------------------------------------|--------|
| Test method                            | <input checked="" type="checkbox"/>   | EN 61000-4-3                                       | <input type="checkbox"/>            | EN 61000-4-20           |                                     |        |
| Test set-up<br>(see annex 3 for photo) | <input checked="" type="checkbox"/>   | Equipment on the table (0.8 m height)              |                                     |                         |                                     |        |
|  | <input type="checkbox"/>  | Equipment standing on floor (0.05 – 0.15 m height) |                                     |                         |                                     |        |
| Voltage – Mains [V]                    | 230 Vac   |  |                                     |                         |                                     |        |
| Frequency – Mains [Hz]                 | 50 Hz   |  |                                     |                         |                                     |        |
| Operating mode(s) used                 | Mode 1  |  |                                     |                         |                                     |        |
| Frequency range<br>(applied)           | Antenna<br>Polarization   | Test level<br>(applied)                            | Modulation<br>(applied)             | Dwell time<br>(applied) | Remark                              |        |
| 80 – 1000 MHz<br>(step size 1%)        | H   | 3 V/m  | 80% AM (1kHz)                       | 3 s                     | 1%                                  |        |
|  | V   | 3 V/m  | 80% AM (1kHz)                       | 3 s                     | 1%                                  |        |
| Exposed side of the EUT                | <input checked="" type="checkbox"/>   | Front (0°)   | <input checked="" type="checkbox"/> | Right (90°)             | <input checked="" type="checkbox"/> | Top    |
|  | <input checked="" type="checkbox"/>   | Rear (180°)  | <input checked="" type="checkbox"/> | Left (270°)             | <input checked="" type="checkbox"/> | Bottom |
| Observation(s)                         | During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed. |  |                                     |                         |                                     |        |
| <u>Supplementary information:</u>      |   |  |                                     |                         |                                     |        |
| ---                                    |   |  |                                     |                         |                                     |        |

|            |  |                      |
|------------|--|----------------------|
| <b>5.6</b> | <b>Electrical Fast Transients immunity</b> | <b>VERDICT: PASS</b> |
|------------|--|----------------------|

The EFT immunity test simulates disturbances by bursts of very short transients caused for example by switching off loads such as an AC motor or bouncing relay contacts. The transients are likely to disturb electronics but less likely to cause damage.

**Requirements**

|   |              |                      |                   |  |
|---|--------------|----------------------|-------------------|--|
| Standard  | EN 61547     |                      |                   |  |
| Basic standard  | EN 61000-4-4 |                      |                   |  |
| Pulse characteristics   | 5/50 ns      |                      |                   |  |
| Port under test   | Test level   | Repetition frequency | Duration          |  |
| <input checked="" type="checkbox"/> AC input-output power   | ± 1000 V     | 5 KHz                | 2 min. / polarity |  |
| <input type="checkbox"/> DC input-output power <sup>2)</sup>  | ± 500 V      | 5 KHz                | 2 min. / polarity |  |
| <input type="checkbox"/> Signal and Control lines <sup>1) 3)</sup>  | ± 500 V      | 5 KHz                | 2 min. / polarity |  |
| <sup>1)</sup> Only applicable to ports interfacing with cables whose total length may exceed 3 m.<br><sup>2)</sup> Only applicable to equipment that is connected to the mains while in use.<br><sup>3)</sup> Change of state commands are not applied during the test. |              |                      |                   |  |

**Performed tests**

|  |                                     |  |                          |        |
|--|-------------------------------------|--|--------------------------|--------|
| Voltage – Mains [V]                    | 230 Vac                             |  |                          |        |
| Frequency – Mains [Hz]                 | 50 Hz                               |  |                          |        |
| Operating mode(s) used                 | Mode 1                              |  |                          |        |
| Test Set-up<br>(see annex 3 for photo) | <input type="checkbox"/>            | Equipment standing on floor at (0.1 ± 0.01) m above ground plane |                          |        |
|  | <input checked="" type="checkbox"/> | Equipment on the table (0.1 ± 0.01) m above ground plane         |                          |        |
|  | <input type="checkbox"/>            | Artificial hand applied. Location refer to annex 3.              |                          |        |
| Coupling                               | <input checked="" type="checkbox"/> | Common mode  | <input type="checkbox"/> | Other: |

| Port under test      | Test Voltage & Polarity   | Repetition Frequency | Test duration / polarity | Injection method                    |     |                          |       |
|----------------------|---|----------------------|--------------------------|-------------------------------------|-----|--------------------------|-------|
|                      |   |                      |                          | <input checked="" type="checkbox"/> | CDN | <input type="checkbox"/> | Clamp |
| AC mains power input | ± 1000 V  | 5 KHz                | 2 min                    | <input checked="" type="checkbox"/> |     | <input type="checkbox"/> |       |
|                      |   |                      |                          |                                     |     |                          |       |
| Observation(s)       | During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed. |                      |                          |                                     |     |                          |       |

|            |                                 |                      |
|------------|---------------------------------|----------------------|
| <b>5.7</b> | <b>Surge transient immunity</b> | <b>VERDICT: PASS</b> |
|------------|---------------------------------|----------------------|

The surge transient immunity test simulates the surges that are caused by over-voltages due to indirect (induced) lightning transients. The pulse is a slow transient with high-energy contents and due to its long duration may cause damage to an unprotected EUT.

#### Requirements

|                       |  |
|-----------------------|--|
| Standard              | EN 61547   |
| Basic standard        | EN 61000-4-5                                     |
| Pulse characteristics | 1.2/50µs Voltage; 8/20µs Current                 |
| Repetition rate       | ≤ 60 secs. (for each test level and phase angle) |
| Number of pulses      | 5 pulses (at each polarity and phase angle)      |

| Device type                         |   | Port                         | Test level & Polarity | Coupling      | Phase angle | Perf. Criteria                  |
|-------------------------------------|---|------------------------------|-----------------------|---------------|-------------|---------------------------------|
| <input type="checkbox"/>            | Luminaires and independent auxiliaries with rated input power > 25 W. | AC input power <sup>1)</sup> | + 1 kV                | Line to Line  | 90°         | C; See chapter 5.2 for details. |
|                                     |   |                              | - 1 kV                | Line to Line  | 270°        |                                 |
|                                     |   | AC input power <sup>1)</sup> | + 2 kV                | Line to Earth | 90°         |                                 |
|                                     |   |                              | - 2 kV                | Line to Earth | 270°        |                                 |
| <input type="checkbox"/>            | Luminaires and independent auxiliaries with rated input power ≤ 25 W. | AC input power               | + 0.5 kV              | Line to Line  | 90°         | C; See chapter 5.2 for details. |
|                                     |   |                              | - 0.5 kV              | Line to Line  | 270°        |                                 |
|                                     |   | AC input power <sup>1)</sup> | + 1 kV                | Line to Earth | 90°         |                                 |
|                                     |   |                              | - 1 kV                | Line to Earth | 270°        |                                 |
| <input checked="" type="checkbox"/> | Self-ballasted lamps and semi-luminaires                              | AC input power               | + 0.5 kV              | Line to Line  | 90°         | C; See chapter 5.2 for details. |
|                                     |   |                              | - 0.5 kV              | Line to Line  | 270°        |                                 |
|                                     |   | AC input power <sup>1)</sup> | + 1 kV                | Line to Earth | 90°         |                                 |
|                                     |   |                              | - 1 kV                | Line to Earth | 270°        |                                 |

<sup>1)</sup> In addition to the specified test level, all lower test levels as detailed in EN 61000-4-5 should also be satisfied.

#### Performed tests

|                        |  |
|------------------------|--|
| Voltage – Mains [V]    | 230 Vac  |
| Frequency – Mains [Hz] | 50 Hz  |
| Operating mode(s) used | Mode 1   |
| Repetition rate        | 60 secs. (for each test level and phase angle) |
| Number of pulses       | 5 pulses (at each polarity and phase angle)    |

See next page.

| Port under test                         |                | Coupling  | Test level & Polarity | Phase angle [°] | Remark |
|---|----------------|---|-----------------------|-----------------|--------|
| <input checked="" type="checkbox"/>     | AC input power | Line to Neutral   | +0.5 kV               | 90              | ---    |
|   |                |   | -0.5 kV               | 270             | ---    |
|   |                |   | +1 kV                 | 90              | N/A    |
|   |                |   | -1 kV                 | 270             | N/A    |
| <input type="checkbox"/>                | AC input power | Line to Earth   | +0.5 kV               | 90              | N/A    |
|   |                |   | -0.5 kV               | 270             | N/A    |
|   |                |   | +1 kV                 | 90              | N/A    |
|   |                |   | -1 kV                 | 270             | N/A    |
|   |                |   | +2 kV                 | 90              | N/A    |
|   |                |   | -2 kV                 | 270             | N/A    |
| <input type="checkbox"/>                | AC input power | Neutral to Earth  | +0.5 kV               | 90              | N/A    |
|   |                |   | -0.5 kV               | 270             | N/A    |
|   |                |   | +1 kV                 | 90              | N/A    |
|   |                |   | -1 kV                 | 270             | N/A    |
|   |                |   | +2 kV                 | 90              | N/A    |
|   |                |   | -2 kV                 | 270             | N/A    |
| <u>Supplementary information:</u>       |                |   |                       |                 |        |
| The EUT does not include an earth port. |                |   |                       |                 |        |
| Observation(s)                          |                | During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance or data was observed. |                       |                 |        |

|            |  |                      |
|------------|--|----------------------|
| <b>5.8</b> | <b>Injected currents (RF common mode) immunity</b> | <b>VERDICT: PASS</b> |
|------------|--|----------------------|

During this test the immunity of the equipment for induced or conducted electromagnetic fields is checked. Fields generated by radio and other transmitters cause RF voltages in long cables like the mains network. This test reproduces these induced disturbing voltages by injecting them to the EUT via the cabling.

**Requirements**

|   |                   |               |           |            |  |
|---|-------------------|---------------|-----------|------------|--|
| Standard  | EN 61547          |               |           |            |  |
| Basic standard  | EN 61000-4-6      |               |           |            |  |
| Frequency range   | 0.15 – 80 MHz     |               |           |            |  |
| Port under test   | Test level, $U_0$ | Modulation    | Step size | Dwell time |  |
| <input checked="" type="checkbox"/> AC input-output power   | 3 V               | 80% AM (1kHz) | ≤ 1%      | ≥ 0.5 s    |  |
| <input type="checkbox"/> DC input-output power <sup>2)</sup>                                      | 3 V               | 80% AM (1kHz) | ≤ 1%      | ≥ 0.5 s    |  |
| <input type="checkbox"/> Signal and Control lines <sup>1)</sup>                                   | 3 V               | 80% AM (1kHz) | ≤ 1%      | ≥ 0.5 s    |  |
| <sup>1)</sup> Only applicable to ports interfacing with cables whose total length may exceed 3 m. |                   |               |           |            |  |
| <sup>2)</sup> Only applicable to equipment that is connected to the mains while in use.           |                   |               |           |            |  |

**Performed tests**

|   |   |   |                     |    |
|---|---|---|---------------------|----|
| Frequency range (applied)                         | Modulation (applied)                    |   | Step size (applied) |    |
| <input checked="" type="checkbox"/> 0.15 – 80 MHz | <input type="checkbox"/> 0.15 – 230 MHz | 80% AM (1kHz)   |                     | 1% |
| Voltage – Mains [V]                               | 230 Vac                                 | Frequency – Mains [Hz]  | 50 Hz               |    |
| Operating mode(s) used                            | Mode 1                                  |   |                     |    |
| Test set-up (see annex 3 for photo)               | <input type="checkbox"/>                | Equipment standing on floor at (0.1 ± 0.01) m above ground plane. |                     |    |
|   | <input checked="" type="checkbox"/>     | Equipment on the table (0.1 ± 0.01) m above ground plane.         |                     |    |
|   | <input type="checkbox"/>                | Artificial hand applied. Location refer to annex 3.               |                     |    |

| Port under test | Test Level (applied) | Injection method | Dwell time (applied) | Remark |
|-----------------|----------------------|------------------|----------------------|--------|
| AC input power  | 3 V                  | CDN-M2           | 3 s                  | ---    |
|                 |                      |                  |                      |        |

Observation(s) During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed.

Supplementary information:  
 1. During the test the metal enclosure of the EUT was connected to the reference ground plane through CDN-M1, the RF port was terminated with 50 Ohm.

|            |   |                      |
|------------|---|----------------------|
| <b>5.9</b> | <b>Power supply interruptions and dips immunity</b> | <b>VERDICT: PASS</b> |
|------------|---|----------------------|

The purpose of the test is to verify the immunity of the equipment against voltage dips and voltage interruptions. It helps to ensure that the equipment functions properly (as expected and safely) with power supply fluctuations. Voltage dips and interruptions are caused by faults in the LV, MV, HV networks (short-circuit or ground faults).

**Requirements**

| Standard   | EN 61547   |                 |       |  |
|--|--|-----------------|-------|--|
| Basic standard   | EN 61000-4-11  |                 |       |  |
| # of dips & interruptions  | 3 dips / interruptions for each test level and phase angle |                 |       |  |
| Interval between events  | ≥ 10 seconds   |                 |       |  |
| Port under test  | Test level <sup>1)</sup>                                   | Period (Cycles) |       | Performance Criteria                     |
|  |  | 50 Hz           | 60 Hz |  |
| AC input power port  | $U_{NOM} - 30\%$   | 10              | 12    | C; Refer to the chapter 5.2 for details. |
| AC input power port  | $U_{NOM} - \geq 95\%$                                      | 0.5             | 0.5   | B; Refer to the chapter 5.2 for details. |
| <sup>1)</sup> Changes to the voltage level shall occur at a zero crossing point in the a.c. voltage waveform.<br><b>NOTE:</b> Where the equipment has a rated voltage range the following shall apply: <ul style="list-style-type: none"> <li>- If the voltage range does not exceed 20% of the lower voltage specified for the rated voltage range. A single voltage within that range may be selected for testing.</li> <li>- In all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.</li> </ul> |  |                 |       |  |

**Performed tests**

| $U_{NOM}$ [V <sub>AC</sub> ]      | Terminal | Test level [% $U_{NOM}$ ]   | Duration [cycles] |       | Repetition rate [s] | Number of dips per test | Phase angle [°] |
|-----------------------------------|----------|---|-------------------|-------|---------------------|-------------------------|-----------------|
|                                   |          |   | 50 Hz             | 60 Hz |                     |                         |                 |
| 230                               | L-N      | 70  | 10                | 12    | 10                  | 3                       | 0, 180          |
| 230                               | L-N      | 0   | 0.5               | 0.5   | 10                  | 3                       | 0, 180          |
|                                   |          |   |                   |       |                     |                         |                 |
|                                   |          |   |                   |       |                     |                         |                 |
| Operating mode                    |          | Mode 1  |                   |       |                     |                         |                 |
| Observation(s)                    |          | During the test no loss of performance was observed. After the test the EUT functioned as intended. No unacceptable loss of performance was observed. |                   |       |                     |                         |                 |
| <u>Supplementary information:</u> |          |   |                   |       |                     |                         |                 |
| ---                               |          |   |                   |       |                     |                         |                 |

## 6 IDENTIFICATION OF THE EQUIPMENT UNDER TEST

The photographs show the tested device.



## 7 ANNEX 1 - MEASUREMENT UNCERTAINTIES

The table(s) below show(s) measurement uncertainties of the EMC test set-ups. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Emission tests  |                 | Uncertainty        | Ucisp              |
|---|-----------------|--------------------|--------------------|
| RF Conducted disturbance (mains port)<br>9 KHz – 30 MHz   | AMN: R&S ENV216 | 3.24 dB            | 3.83 dB            |
| RF Conducted disturbance (control terminals) using AAN (asymmetrical artificial network) method, 150 KHz – 30 MHz |                 | 4.04 dB<br>4.44 dB | 4.20 dB<br>4.59 dB |
| Conducted disturbance using a VP, 150kHz – 30MHz  |                 | 1.82 dB            | 2.91 dB            |
| Conducted disturbance using a CVP, 150kHz – 30MHz   |                 | 3.44 dB            | 3.85 dB            |
| Conducted disturbance using a CP, 150kHz – 30MHz  |                 | 2.66 dB            | 2.89 dB            |
| Radiated disturbance using CDNE, 30MHz – 300MHz   |                 | 3.12 dB            | 3.79 dB            |
| Radiated disturbance, 9 kHz – 30 MHz (triple loop)  |                 | 2.62 dB            | 3.30 dB            |
| Radiated disturbance, 30 MHz – 200 MHz (Horz.) ----- Audix  |                 | 4.50 dB            | na                 |
| Radiated disturbance, 200 MHz – 1000 MHz (Horz.) ----- Audix  |                 | 4.60 dB            |                    |
| Radiated disturbance, 30 MHz – 200 MHz (Vert.) ----- Audix  |                 | 4.50 dB            | na                 |
| Radiated disturbance, 200 MHz – 1000 MHz (Vert.) ----- Audix  |                 | 5.70 dB            |                    |
| LF harmonic current emissions   |                 | 0.20 %             | na                 |
| LF voltage fluctuations   |                 | 2.50 %             | na                 |

| Immunity tests                                    | Uncertainty  |
|---|--|
| Electrostatic discharge                           | $U_{peak}=6\%$ , $U_{30ns}=6\%$<br>$U_{60ns}=6\%$ , $U_{rit}=13\%$ |
| Radio-frequency electromagnetic fields----- Audix | 2.50 dB  |
| Fast transients                                   | $U_{tr}=6.2\%$ , $U_{pw}=3\%$<br>$U_{bp}=3\%$ , $U_{bd}=3\%$       |
| Surges  | $U_{peak}=3.3\%$ , $U_{ft}=3\%$ , $U_{dt}=3\%$                     |
| Injected currents (radio-frequency common mode)   | 1.71 dB  |
| Voltage dips and short interruptions              | $U_{out}=0.4\%$ , $U_i=3\%$ , $U_{r-d}=3\%$                        |

## 8 ANNEX 2 – USED EQUIPMENT

| Conducted disturbance -Shielded Room No.1        |              |            |            |               |
|--|--------------|------------|------------|---------------|
| Equipment  | Manufacturer | Model No.  | Serial No. | Cal. due date |
| EMI test receiver                                | R&S          | ESR3       | 102958     | 2025/06/05    |
| Artificial Mains Network                         | R&S          | ENV216     | 102772     | 2025/06/05    |
| Asymmetric artificial network                    | SCHWARZBECK  | NTFM8131   | 8131-151   | 2025/06/13    |
| Attenuator 26dB                                  | SHANGHAI ESE | 20dB+6dB   | 01         | 2025/06/05    |
| High power voltage probe                         | SCHWARZBECK  | TK9421     | #308       | 2025/06/05    |
| Current probe                                    | ETS.LINDGREN | 91550-1L   | 218473     | 2025/06/05    |
| Software   | R&S          | ELEKTRA    | 4.32.0     | N/A           |
| Conducted disturbance -Shielded Room No.2        |              |            |            |               |
| Equipment  | Manufacturer | Model No.  | Serial No. | Cal. due date |
| EMI test receiver                                | R&S          | ESR3       | 102305     | 2025/06/29    |
| Four-line V-network                              | R&S          | ENV432     | 101634     | 2025/11/28    |
| Artificial Mains Network                         | R&S          | ENV216     | 102747     | 2025/11/28    |
| 8-Wire ISN                                       | R&S          | ENV81      | 100448     | 2025/11/28    |
| 8-Wire ISN for CAT6                              | R&S          | ENV81-CA6  | 101929     | 2025/11/28    |
| Asymmetric artificial network                    | SCHWARZBECK  | NTFM8131   | 8131-151   | 2025/06/13    |
| High impedance Capacitive voltage probe          | SCHWARZBECK  | CVP 9222 C | 00083      | 2025/11/28    |
| High power voltage probe                         | SCHWARZBECK  | TK9421     | #308       | 2025/06/05    |
| Current probe                                    | ETS.LINDGREN | 91550-1L   | 218473     | 2025/06/05    |
| Software   | R&S          | ELEKTRA    | 4.32.0     | N/A           |
| Radiated disturbance-CDN/CDNE-Shielded Room No.1 |              |            |            |               |
| Equipment  | Manufacturer | Model No.  | Serial No. | Cal. due date |
| EMI test receiver                                | R&S          | ESR3       | 102958     | 2025/06/05    |
| Coupling/Decoupling Network                      | SCHWARZBECK  | CDNE M3    | 00088      | 2025/10/31    |
| Coupling/Decoupling Network                      | SCHWARZBECK  | CDNE M2    | 00110      | 2025/01/29    |
| Coupling/Decoupling Network                      | TESEQ        | CDN M016S  | 34640      | 2025/06/05    |
| Software   | R&S          | ELEKTRA    | 4.32.0     | N/A           |
| Radiated disturbance-CDN/CDNE-Shielded Room No.2 |              |            |            |               |
| Equipment  | Manufacturer | Model No.  | Serial No. | Cal. due date |
| EMI test receiver                                | R&S          | ESR3       | 102305     | 2025/06/29    |
| Coupling/Decoupling Network                      | SCHWARZBECK  | CDNE M3    | 00204      | 2025/11/28    |
| Coupling/Decoupling Network                      | SCHWARZBECK  | CDNE M2    | 00194      | 2025/06/05    |

|  |                        |                  |              |               |
|--|------------------------|------------------|--------------|---------------|
| Coupling/Decoupling Network  | TESEQ                  | CDN M016S        | 34640        | 2025/06/05    |
| Software   | R&S                    | ELEKTRA          | 4.32.0       | N/A           |
| Radiated disturbance (9 kHz to 30 MHz)   |                        |                  |              |               |
| Equipment  | Manufacturer           | Model No.        | Serial No.   | Cal. due date |
| EMI test receiver  | R&S                    | ESCI             | 101351       | 2025/06/05    |
| 3-dimensional large loop antenna   | SCHWARZBECK            | HXYZ 9170        | HXYZ9170-245 | 2025/06/05    |
| Software   | AUDIX                  | e3               | V8.130528a   | N/A           |
| Radiated disturbance (9 kHz to 30 MHz) -Anechoic Chamber No.1                  |                        |                  |              |               |
| Equipment  | Manufacturer           | Model No.        | Serial No.   | Cal. due date |
| EMI test receiver  | R&S                    | ESR7             | 102433       | 2025/11/28    |
| Open Switch and control unit   | R&S                    | OSP220           | 102232       | N/A           |
| Active loop antenna  | SCHWARZBECK            | HFH2-Z2E         | 101077       | 2025/04/24    |
| Software   | R&S                    | ELEKTRA          | 4.20.2       | N/A           |
| Radiated disturbance (30 MHz to 1000 MHz) -Anechoic Chamber No.1               |                        |                  |              |               |
| Equipment  | Manufacturer           | Model No.        | Serial No.   | Cal. due date |
| EMI test receiver  | R&S                    | ESR7             | 102433       | 2025/11/28    |
| Trilog broadband antenna   | SCHWARZBECK            | VULB9163/<br>6dB | 01514        | 2025/03/12    |
| Open Switch and control unit   | R&S                    | OSP220           | 102232       | N/A           |
| Coupling/Decoupling Network  | SCHWARZBECK            | CDNE M2          | 00194        | 2025/06/05    |
| Coupling/Decoupling Network  | SCHWARZBECK            | CDNE M3          | 00204        | 2025/11/28    |
| CMAD   | SCHWARZBECK            | CMAD1614         | 00538        | 2025/11/28    |
| Software   | R&S                    | ELEKTRA          | 4.20.2       | N/A           |
| Radiated disturbance (1000 MHz to 6000 MHz) -Anechoic Chamber No.1             |                        |                  |              |               |
| Equipment  | Manufacturer           | Model No.        | Serial No.   | Cal. due date |
| EMI test receiver  | R&S                    | ESR7             | 102433       | 2025/11/28    |
| Pre-amplifier  | R&S                    | SCU18F           | 100850       | 2025/11/28    |
| Open Switch and control unit   | R&S                    | OSP220           | 102232       | N/A           |
| Horn antenna   | ETS                    | 3117             | 00240298     | 2025/04/12    |
| Software   | R&S                    | ELEKTRA          | 4.20.2       | N/A           |
| Harmonic current emissions & Voltage changes, voltage fluctuations and flicker |                        |                  |              |               |
| Equipment  | Manufacturer           | Model No.        | Serial No.   | Cal. due date |
| Harmonic currents and flicker tester   | California Instruments | CTS              | 1306A00135   | 2025/06/05    |
| AC power source  | California Instruments | 5001iX-CTS-400   | 1306A00135   | 2025/06/05    |
| Harmonic currents and flicker tester   | EMTEST                 | DPA 500N         | P2114250803  | 2025/01/11    |

|  |                        |              |                  |               |
|--|------------------------|--------------|------------------|---------------|
| AC power source  | EMTEST                 | Netwave7-400 | P2136256253      | 2025/01/11    |
| Software   | California Instruments | CTS4         | 4.29.0           | N/A           |
| Software   | AMETEK                 | NET.CONTROL  | 3.1.3            | N/A           |
| Electrostatic discharge immunity   |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| ESD generator  | TESEQ                  | NSG 435      | 6716             | 2025/08/20    |
| ESD generator  | TESEQ                  | NSG 437      | 1447             | 2025/10/22    |
| ESD generator  | TESEQ                  | NSG 438      | 1870             | 2025/11/23    |
| Voltage dips and short interruptions immunity  |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| Compact immunity test system   | TESEQ                  | NSG-3040-MF  | 2006/DIPS:2062   | 2025/06/05    |
| Automatic step transformer with circuit breaker  | TESEQ                  | INA 6502-CIB | 217              | NCR           |
| Surge immunity   |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| Compact immunity test system   | TESEQ                  | NSG-3040-MF  | 2006 /SURGE:1234 | 2025/06/05    |
| Coupling/Decoupling Network (CDN)  | TESEQ                  | CDN 117-M    | 35452            | NCR           |
| Fast transient immunity  |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| Compact immunity test system   | TESEQ                  | NSG-3040-MF  | 2006/EFT:0535    | 2025/06/05    |
| EFT/Burst capacitive coupling clamp  | TESEQ                  | CDN 3425     | 1786             | NCR           |
| Injected currents immunity   |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| Compact immunity test system   | TESEQ                  | NSG 4070-30  | 35895            | 2025/06/05    |
| Coupling/Decoupling Network (CDN)  | TESEQ                  | CDN M016S    | 34640            | 2025/06/05    |
| Attenuator   | TESEQ                  | ANT 6050     | 34847            | 2025/06/05    |
| EM clamp   | TESEQ                  | KEMZ 801A    | 35475            | 2025/06/05    |
| Radio-frequency electromagnetic fields immunity (80 MHz~1000 MHz) -Anechoic Chamber No.2 |                        |              |                  |               |
| Equipment  | Manufacturer           | Model No.    | Serial No.       | Cal. due date |
| Signal generator   | R&S                    | SMB100B      | 103114           | 2025/11/28    |
| Broadband Amplifier  | R&S                    | BBA150 BC250 | 104841           | 2025/11/28    |
| High Gain Log-periodic antenna   | R&S                    | HL046E       | 100355           | NCR           |

|  |              |              |            |               |
|--|--------------|--------------|------------|---------------|
| Open Switch and control unit   | R&S          | OSP220       | 102233     | NCR           |
| NRP6AN average power sensor  | R&S          | NRP6AN       | 101697     | 2025/11/28    |
| NRP6AN average power sensor  | R&S          | NRP6AN       | 101698     | 2025/11/28    |
| Field probe  | LUMILOOP     | LSProbe 1.2  | 531        | 2025/08/27    |
| Software   | R&S          | ELEKTRA      | 4.20.2     | N/A           |
| Radio-frequency electromagnetic fields immunity (1 GHz~6 GHz) -Anechoic Chamber No.2 |              |              |            |               |
| Equipment  | Manufacturer | Model No.    | Serial No. | Cal. due date |
| Signal generator   | R&S          | SMB100B      | 103114     | 2025/11/28    |
| Broadband Amplifier  | R&S          | BBA150C D110 | 104831     | 2025/11/28    |
| Stacked Log.- Per. antenna   | SCHWARZBECK  | STLP 9149    | 00518      | N/A           |
| Open Switch and control unit   | R&S          | OSP220       | 102233     | N/A           |
| NRP6AN average power sensor  | R&S          | NRP6AN       | 101697     | 2025/11/28    |
| NRP6AN average power sensor  | R&S          | NRP6AN       | 101698     | 2025/11/28    |
| Field probe  | LUMILOOP     | LSProbe 1.2  | 531        | 2025/08/27    |
| Software   | R&S          | ELEKTRA      | 4.20.2     | N/A           |

## 9 ANNEX 3 – TEST PHOTOS

### Conducted disturbance at electric power supply interface



### Radiated disturbances (9 kHz to 30 MHz)




### Radiated disturbances-CDNE (30 MHz to 300 MHz)




### Harmonic current emissions & Flicker




### Radiated EM Field Immunity

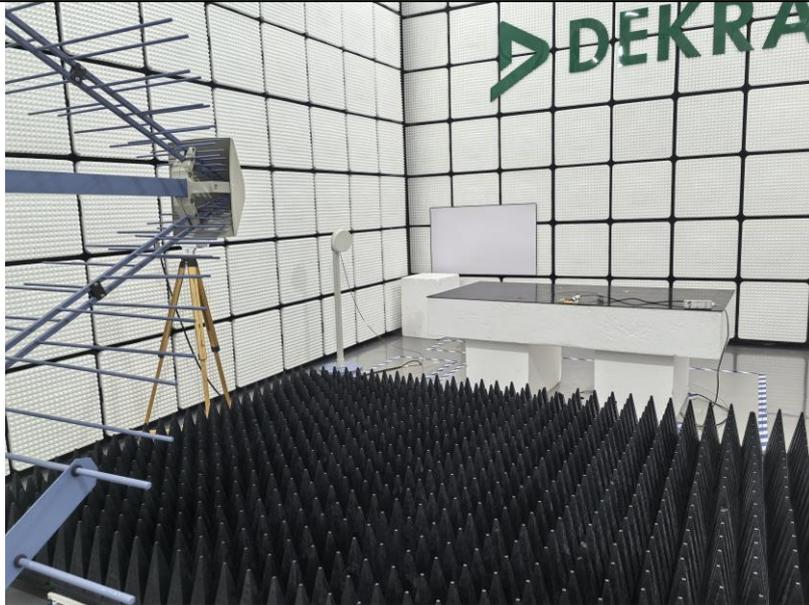

### Electrostatic discharge immunity

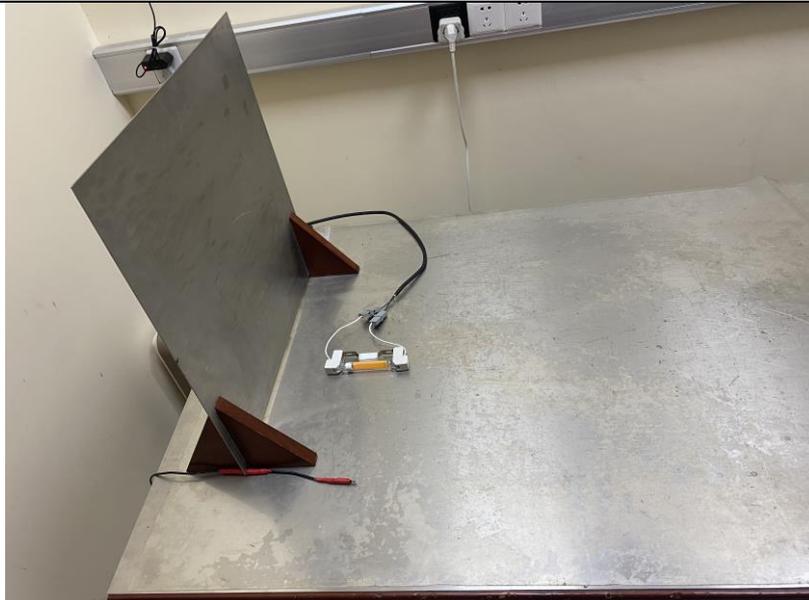

**Electrical fast transient (EFT) / Burst transients / Surge transients / Power supply voltage interruptions & dips immunity**

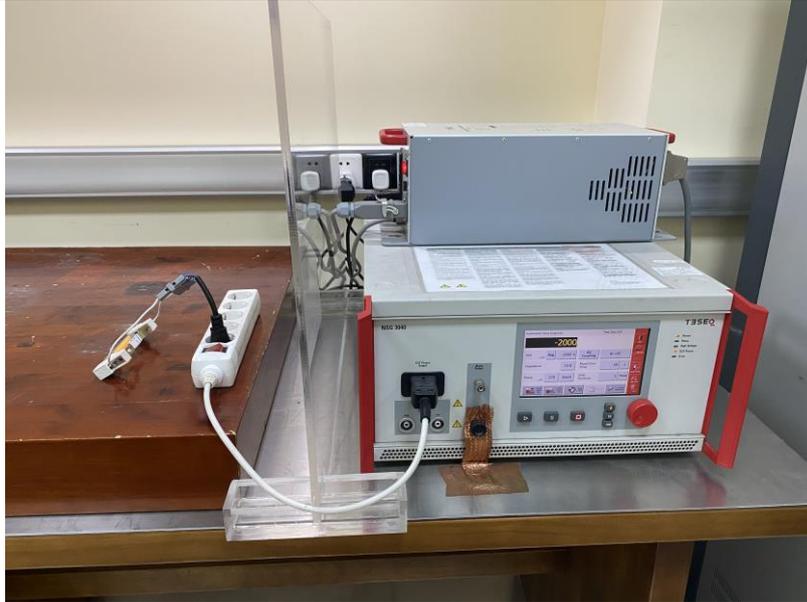

**Conducted RF disturbances immunity**



## 10 ANNEX 4 – MODEL LIST

| Model name                      | Voltage;<br>Frequency<br>(V~; Hz) | Rated<br>wattage (W) | Rated<br>current (A) | Size<br>(mm) |
|---------------------------------|-----------------------------------|----------------------|----------------------|--------------|
| PY-R7S-4W-230-CCT-80-WPS-470    | 220-240V~;<br>50/60 Hz            | 4                    | 0,037                | Φ16*78       |
| PY-R7S-4W-230-CCT-80-WPS-500    |                                   | 4                    | 0,037                | Φ18*78       |
| PY-R7S-5W-230-CCT-80-WPS-600    |                                   | 5                    | 0,045                | Φ18*118      |
| PY-R7S-8W-230-CCT-80-WPS-900    |                                   | 8                    | 0,070                | Φ16*118      |
| PY-R7S-9.5W-230-CCT-80-WPS-1100 |                                   | 9.5                  | 0,078                | Φ16*118      |
| PY-R7S-11W-230-CCT-80-WPS-1500  |                                   | 11                   | 0,100                | Φ18*118      |

-----END-----